() vanarama

Low Floor Luton Renault Master LL35DCI 135 Business Low Roof Platform Cab



Dimensions

| Total external height | 3060mm | Payload up |
|--------------------------------|--|---|
| Headboard to rear shutter door | 4100mm | Lightweigh |
| Body width with no Load Lock | 2100mm | Full pod & |
| Body width with Load Lock | 2070mm | cab |
| Roof to floor | 2190mm | Wisadeck I |
| Rear door apertures | | Lashing po |
| Thin slat roller shutter | 1840 (W) | Domar the |
| | 1840 (H) This is from the roller door pull down strip to the bed level | 2 rows of lo shoring po side 1 foot |
| Body Length | 4150mm | Load Volun |

Specification

| Payload u | p to 1188kg |
|-------------------|--|
| Lightweig | ht eco font honeycomb panels |
| Full pod & cab | side skirts with cut through to utilise the space above the |
| Wisadeck | hard wearing non-slip flooring |
| Lashing po | pints built into the floor each side of the body |
| Domar the | ermo plastic mud wings |
| shoring po | load lock secured to each side of the body. Designed for bles Ply line kick plate around the bulk head, near side and off t high all round 1 x internal led light. |
| Load Volu | me 19.3m cubed |





11

Renault MASTER

MASTER

October 2020



Renault MASTER, a vehicle for everyone

Renault presents Renault MASTER and reasserts its expertise in the field. MASTER is instantly distinguished through a more dynamic front-end design featuring the signature C-shaped lighting. An elevated bonnet line, vertical front grille and new 'Urban Grey' colour complete the revised styling. MASTER is available in three body heights and four body lengths to adapt to the needs of all users.

MASTER

1007 (201-





WINNER LARGE VAN OF THE YEAR RENAULT MASTER



WINNER LCV OF THE YEAR RENAULT MASTER

Driving has never been as comfortable

Professionals have tough and busy days; this is why the Renault MASTER cabin area has been designed to provide the comfort and practicality of a 'Mobile Office'. Packed with clever solutions, such as hidden laptop storage, that help to keep you connected on the go. (standard on Business+).






Easy and secure loading

MASTER gives priority to practicality and efficiency. The rear doors can be opened 270° (optional), and the very low body sill makes it easier to load cumbersome items. Anchorage points (up to 12) secure the goods, and handles, ideally placed on the sides of the doors, save you effort in loading and unloading from the rear area. With its wide rear and side openings and optimum load volume (from 8 m³ to 22 m³), MASTER adapts to the needs of all users.

In terms of security, the reinforced locks, factory fit alarm^{*} and 3-button key (standard on Business+) ensure that you work with complete peace of mind.

*Alarm not standard on MASTER Z.E.



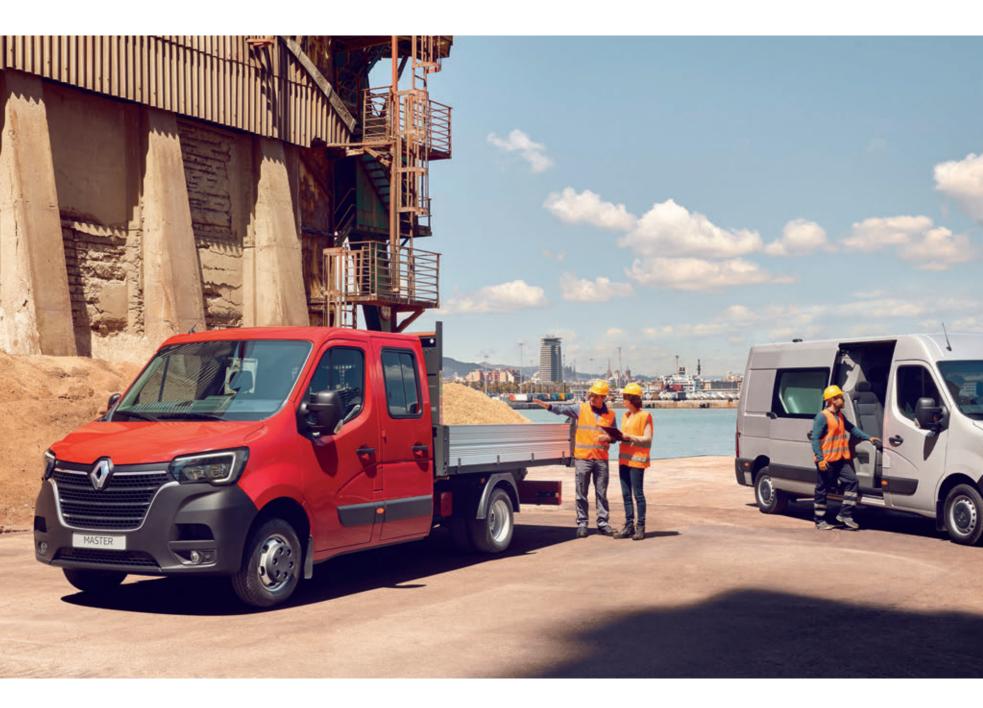



Our profession, adapting to yours

MASTER is the tailor-made utility vehicle! A widerange of body styles are available and include specific versions that meet unique needs: tippers (including the Aluminium Body version) and box vans. These variants are 100% Renault 'off-theshelf' products produced and delivered as quickly as our standard vehicles.


It is also easy to convert a more bespoke vehicle using either a panel van, chassis (single or double cab) or platform cab with thanks to one of our many Renault approved converters across the UK.

For more details about our range of Off-the-shelf and Tailor Made accredited conversions please see our separate Conversions Range brochure.







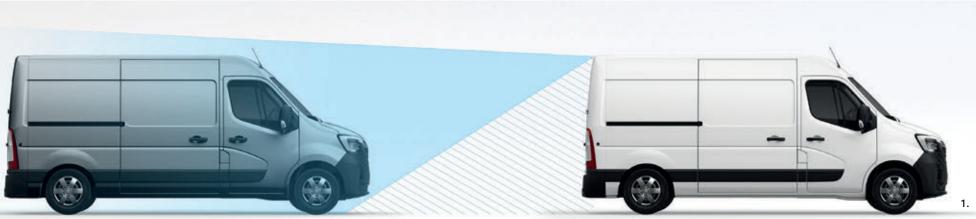

Performance and safety

In terms of driving, the increased power and torque offer greater comfort at low engine speed and more responsiveness at higher speed. The Renault MASTER engines help you save fuel through controlled consumption.

Rear View Assist Camera: The new driving assistance systems do everything to make your life easier. The "Rear View Assist", a Renault innovation, offers excellent rear view at mid and long distance for the best possible anticipation when driving^{*}.


Blind spot warning: MASTER can be fitted with a system that detects the presence of any vehicle in your blind spot. Active between 19 mph and 87 mph, a light signal alerts you immediately in the event of an obstacle and gives you an optimised side view.


Side Wind Assist: MASTER is fitted with a system that helps maintain its trajectory above 43 mph when it is subjected to strong side winds or when a vehicle is overtaking it.

Automatic Emergency Braking System: An active safety system able to detect moving or stationary vehicles. Automatic emergency braking is triggered and takes charge of braking if you react with a delay.

(1) Rear View Assist Camera (optional)
(2) Blind spot warning (optional)
(3) Side wind assist (standard)
(4) Advanced Emergency Braking System (optional)
* Only when driving forward, does not function when vehicle is reversing.




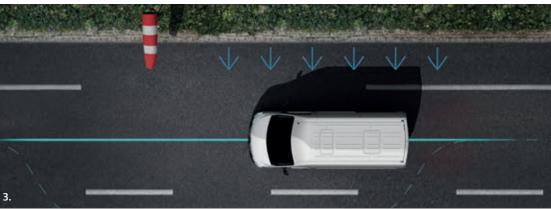

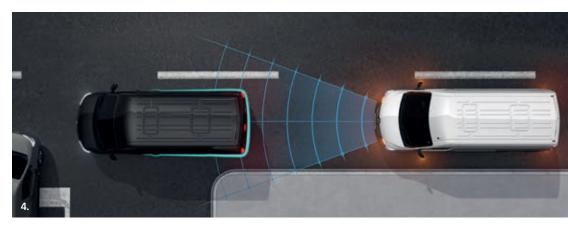



Front-wheel drive

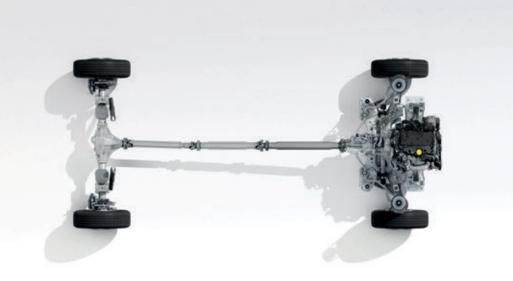

Rear-wheel drive

Two versions available

Does your business involve the transport of heavy, cumbersome and fragile loads? MASTER has two technical choices to meet your requirements: a front-wheel drive version and a rear-wheel drive version. Which to choose? Each offers unrivalled road handling and has its own advantages. With a loading sill that is 13 mm lower, MASTER frontwheel drive* and its 3 different lengths is perfect for payload and road transport. But if you're looking for traction as a priority, choose MASTER rear-wheel drive, capable of transporting the heaviest loads on the rear axle (in particular with twin wheels) and towing a trailer up to 3.5 t**, on all types of terrain. After all, what better than to have a choice?

* GVW up to 3.5 t. ** Twin wheel rear-wheel drive chassis version.





Drive anywhere, in all weather

Do you drive all the time on different types of terrain and sometimes on bad roads? To meet occasional demands for enhanced traction and help you deal with poor driving conditions, Renault has developed new technology: Grip Xtend is the technology for you. Renault has developed this to improve the adaptability of your utility vehicle on difficult roads, such as unpaved or muddy tracks. The onboard computer recovers data from the wheels to optimise the vehicle's performance. When grip is lost, it adapts engine power to each wheel to improve the grip and manoeuvrability of the vehicle.

MASTER 4x4 (developed with Oberaigner) is there to help you. Thanks to the four-wheel drive system, its raised ground clearance and differential locking, slippery surfaces, rough roads, damp and steep slopes will no longer prevent you from working. In 2-wheel drive mode, it has an automatic rear differential lock which can be activated. It can also be activated in full 4-wheel drive mode with a front differential lock. The MASTER 4x4 suspension is raised by: 65 mm at the front/45 mm at the rear (twin wheels)/58 mm at the rear (single wheels). MASTER 4x4 also includes metal plate protection under the engine and under the body to protect vital components^{*}.









Cutting emissions and your costs: the 100% electric MASTER Z.E.

Introducing the MASTER Z.E. – ultra low running costs, zero emissions whilst driving and 75 miles (WLTP^{***}), giving a realworld driving range of 75 miles in summer and 50 miles in winter. All that while maintaining the same dimensions as its diesel equivalents! The MASTER Z.E. has an impressive load capacity of up to 19m^{3^} and a payload that goes up to 1,425kg, plus all the extra benefits of owning an electric vehicle. Reduced road noise, no congestion charges^{*} and low running costs from less than 6.5p per mile^{**} prove that our MASTER Z.E. will not only be a great purchase for your fleet but also for your pocket!

*Emission based congestion charges in ULEZ's including London Congestion Charge as of 2020. **Less than 6.5p per mile calculated by (a) electricity charges (e.on Go Online 1 Year v18) rates for payment via monthly Direct Debit as of Sept 2018) and (b) a full recharge of the 33kWh battery giving £5 full recharge cost divide by the real world summer range in miles. ***WLTP figures shown are for comparability purposes; only compare figures with vehicles tested to the same technical procedures. The WLTP electric range shown has been achieved using the new (WLTP) test procedure. Figures obtained after the battery was fully charged. Actual real world driving results may vary depending on factors such as the starting charge of the battery, accessories fitted after registration, weather conditions, driving styles and vehicle load. Renault estimates average real world driving figures for this vehicle as 75 miles in summer and 50 miles in winter, depending on the factors above. ^ Load volume dependent on conversion










Your 100% controlled driving range

MASTER Z.E. has 75 miles⁽¹⁾ of driving range in actual use thanks to its lithium-ion Z.E. 33 (33 kWh) battery. The 57 kW power unit offers a torque of 225 Nm and optimum driving comfort. A range of on-board technologies, such as regenerative braking (the battery recharges when the accelerator pedal is released or when the brake pedal is pressed) or the Eco mode (less abrupt acceleration and maximum speed of 50 mph), help optimise your driving range. You can charge your MASTER Z.E. in just 6 hours with a 32 A/7 kW Wallbox. The recharging flap located on the right-hand side of the vehicle, is easily accessible.

(1) Real-world driving range greater than 50 miles including the most severe use (high load, city centre driving with frequent stops and winter conditions). Actual consumption also depends on the equipment, the driving style of the driver and the elevation profile of the route.

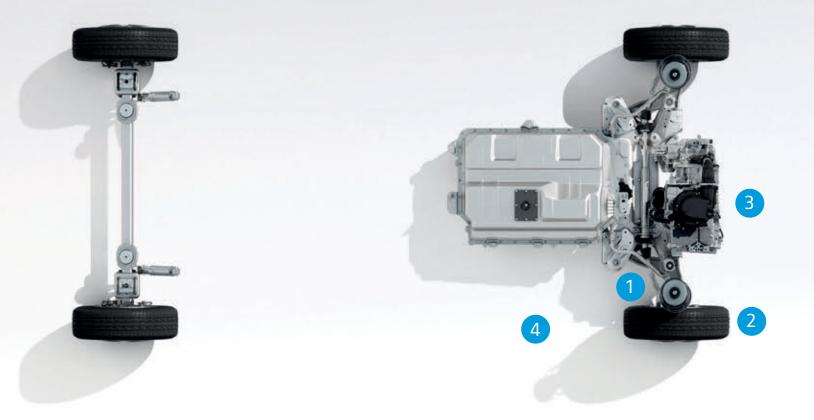

1. Regenerative braking. The battery recharges when you take your foot off the accelerator or when you press on the brake pedal.

2. Low consumption tyres. Their low rolling resistance contributes to conserving your driving range without degrading your road-holding or braking ability.


3. Eco mode. When you activate this, you reduce the power output of the vehicle so that you can travel further (less abrupt acceleration and maximum speed of 50 mph).

4.7 kW charger. Recharge the battery in just 6 hours with a 32 A/7 kW Wallbox. The recharging flap located on the right-hand side of the cab, is easily accessible.

Charging your MASTER Z.E.

| L | KE | Y | |
|---|----|------------------|---------------|
| l | | Driving Distance | Charging Time |

CHARGING AT HOME - couldn't be easier to charge your MASTER Z.E. at home*, just park your van, plug it in and go inside.

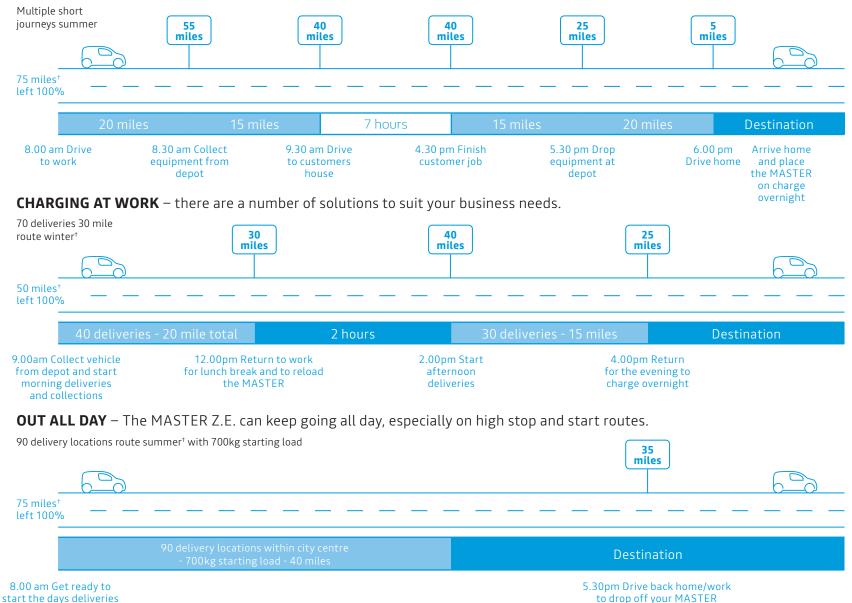

* subject to off street parking and wall-box suitability.

[†] Figures shown are for comparability purposes; only compare figures with vehicles tested to the same technical procedures. There is a new test for electric range figures however the electric range figures shown are based on the outgoing (NEDC) test cycle. Figures obtained after the battery was fully charged. Actual real world driving results may vary depending on factors such as the starting charge of the battery, accessories fitted after registration, weather conditions, driving styles and vehicle load.

Find the electric LCV that's right for you!

Z.E. - Full purchase

To prevent you from the hassle of worrying about monthly plans, we provide you your MASTER Z.E. with batteries included.



No on-going monthly payments, just one simple payment.




No mileage limit.



Battery guarantee* of 5 years / 62,000 miles, whichever comes first, this includes the battery performance guarantee to at least 70% of its original capacity.



Roadside assistance, breakdown only.

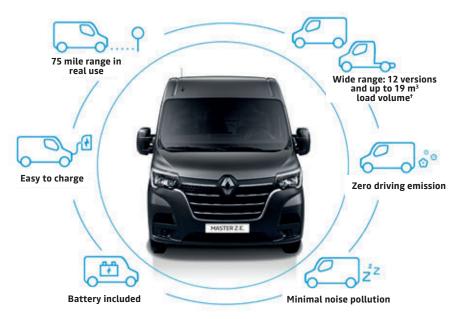

*For full terms and conditions visit https://www.cdn.renault.com/content/dam/Renault/UK/brand-and-editorial/Aftersales/ZE-warranty-2018.pdf *Requires conversion

Charging solutions – options that suit your needs!

We offer you several charging solutions to make sure your vehicle is always ready to go!

| Type of charger | Where to use it | Power required | Charging times (0-100%) | |
|-----------------------|--|----------------|----------------------------|--|
| Home | Home / Office | 2.3kW/10A | 17 hours | Occasional slow charging. |
| (3-pin plug cable)* | Home / Office | 3.3kW/14A | 12 hours | *Requires additional purchase of a EVSE cable. |
| Wallbox / | Home / Office / On the go | 3.7kW/14A | 11 hours | Leaving the MASTER to charge overnight on a 3.7kW charger |
| Public charging point | Home / Office / On the go | 7kW | 6 hours | ensures that it will be ready for when you to begin your next day. |
| Dublic charging point | On the go | 22kW | 6 hours | A standard charging time of 6 hours means your vehicle is ready |
| Public charging point | On the go | 43kW | 6 hours | to go when you are. |
| | Home / Office / On the go On the go | 22kW | 6 hours | ensures that it will be ready for when you to begin your next da A standard charging time of 6 hours means your vehicle is read |

Colours





















| | Mineral White (QNG) | Urban Grey (KPW) | Carmen Red (719) | Orange (031) | Lemon Yellow (396) | Persian Blue (RNQ) | Caribbean Blue (423) | Star Grey (KNH) | Tempest (J47) | Pearl Black (676) |
|-----------|------------------------|---------------------|---------------------|-----------------|-----------------------|-----------------------|-------------------------|--------------------|------------------|----------------------|
| Business | • | • | • | • | • | • | • | 0 | 0 | 0 |
| Business+ | • | • | • | • | • | • | • | 0 | 0 | 0 |

•= Standard (therefore no cost) \circ = Optional

(S) Solid paint (M) Metallic paint

Every effort has been made to ensure that the information, descriptions, and images were correct at the time of publication however images may not always reflect the exact version selected. It should be noted that limitations on screen do not permit the subtle paintwork shades on this page to be shown with absolute accuracy.

Standard features





16" steel wheels





Kaleido



Technology

- Radio with DAB, Bluetooth and USB
- 6-speed gearbox
- ESC (Electronic Stability Control) with Grip Xtend, Hill Start Assist and Trailor Swing Assist
- Trip computer multi-functional

Interior

- Closed glove box
- \cdot 2 cup holders on centre console
- Driver's seat height adjustable, lumbar adjustment and armrest
- Steering wheel height adjustment
- Electric front windows
- Passenger bench seat
- Overhead parcel shelf
- Kaleido dark grey upholstery

Exterior

- Left side loading door unglazed
- 80-litre fuel tank
- 22-litre AdBlue tank
- C-Shaped DRL's (Daytime running lights)
- Door mirrors electric adjustment, heated
- •16" steel wheels with small wheel stylers
- Rear doors unglazed, 180°
- Spare wheel

Safety and security

- Full-steel bulkhead
- ABS with EBD (Electronic Brake force
- Distribution) • Alarm (excluding MASTER Z.E.)
- Electronic immobiliser
- Electronic ininobiliser
- Remote central locking (foldable 2 button key)
- Airbag driver
- Seatbelts 3 point height-adjustable seatbelts with pretensioners

- 4 disc brakes
- Automatic headlights and wipers
- Deadlocking
- Rear running board and handles

• Anchorage points : L1 - 6, L2 - 8, L3 - 10, L4 - 12 Weight allowed per anchorage point: approximately 500kg'

Specific Z.E. Equipment

- Z.E. charging socket (right-hand side)
- Z.E. Voice: emits a distinctive range of sounds signalling that the vehicle is moving
- Engine speed limiter 62 mph
- Standard charging cable 32A (IEC 62196 -Type 2 Mennekes) 6m

Crew Van adds

- 2nd row of 4 passenger seats
- Integrated storage nets and cup holders
- Single passenger seat on LWB versions
- Left and right side loading doors glazed
- Bulkhead full-steel with glazing

RWD additional equipment

- Rear step
- Side marker lights (LWB or MWB with extended overhang only)
- Lane departure warning system (4.5T versions only)
- Engine speed limiter 56mph (to meet legal requirement) 4.5T version only
- Digital tachograph (4.5T version only) and CAN interface unit

Standard features





16" steel with large wheel stylers





Kaleido

BUSINESS+ (in addition to BUSINESS)

Interior

- Manual air conditioning and pollen filter
- Electric front windows driver's side one touch descending
- Driver's seat fully adjustable suspension type (panel vans only, not crew vans)
- Interior chrome trim
- Pivoting seatback table with dual split
- underseat storage compartment
- 12V power socket in load area

Exterior

- 16" steel wheels with large wheel stylers
- Chrome trim on front grille

Safety and Security

- Wide view mirror
- Rear parking sensors

Standard features - Conversions

BUSINESS





Chassis cab

Dropside



Tipper

Chassis Cab and Platform Cab

Technology

• Radio with DAB, Bluetooth and USB

Platform cab

- 6-speed gearbox
- ESC (Electronic Stability Control) with Grip Xtend, Hill Start Assist and Trailer Swing Assist
- Trip computer multi-functional

Interior

- Closed glove box
- 2 cup holders on central console
- Driver's seat height adjustable, lumbar adjustment and armrest
- $\boldsymbol{\cdot}$ Steering wheel height adjustment
- $\boldsymbol{\cdot} \, \mathsf{Electric} \, \mathsf{front} \, \mathsf{windows}$
- Passenger bench seat
- $\boldsymbol{\cdot}$ Overhead parcel shelf
- \cdot Kaleido dark grey upholstery

Exterior

- 80-litre fuel tank
- 22-litre AdBlue tank
- C-Shaped DRL's (Daytime running lights)
- $\boldsymbol{\cdot}$ Door mirrors electric adjustment, heated
- 16" steel wheels with small wheel stylers
- Side marker lights wiring (on LL, MLL and LLL versions only)
- Spare wheel

Safety and security

- Full-steel bulkhead
- ABS with EBD (Electronic Brake force Distribution)
- Automatic headlights and wipers
- Electronic immobiliser
- Alarm (excluding MASTER Z.E.)
- Remote central locking
- (foldable 2 button key)
- Airbag driver
- Bulkhead full-steel with glazing (full-steel bulkhead on Platform Cab and Luton Low Loader, unglazed)
- 4 disc brakes
- Deadlocking

RWD adds

- Digital tachograph (4.5T versions only) and CAN interface unit
- Engine speed limiter 56mph (to meet legal requirement) (4.5T version only)

Double cab adds

- Second row of 4 passenger seats
- Single passenger seat on all Factory Tippers and Twin Rear Wheel Dropsides only**
- Left and right rear lateral doors glazed

Dropside adds

- Hot-galvanised steel front side panel and platform
- Anti-slip wooden floor
- Anchorage points in loading area (6 to 8 depending on version) Weight allowed per anchorage point: approximately 500kg
- Folding and removable aluminium side and rear panels (400mm high)
- Foldaway step on rear side panel
- Steel cab protecting grid with ladder/long object rack
- Rear corner pillars
- Version available with a tail lift as standard (Del 500kg mesh platform tail lift with 915mm platform and fixed leading edge)
 Additional options available on request
- via VFS

Tipper adds

- Rear tipping "Scattolini" body (45°)
- Hot-galvanised steel loading deck
- (2 mm thick) • Aluminium side and rear panels (400 mm high)
- Aluminium cab protecting grid with ladder/ long object rack

Aluminium Tipper adds (different from Factory Steel Tipper)

- Tipper sub-frame manufactured from aluminium, constructed using "state of the art" robotic aluminium Spot and TiG welding
- Aluminium Cab Protector
- Aluminium / Composite Tool Pod fitted as standard on single cab LL versions
- Additional options available on request via VFS

Luton Box Van adds

- 11mm think GRP side panels, with
- fibreglass roof skin on a 65 mm alloy frame • 15 mm thick wisdeck birch floor
- Luton front providing over-the-cab storage fitted as standard
- Rear doors roller shutter on alloy frame with rear columns designed to support column mounted tail lift
- Version available with a tail lift as standard (Del 500kg column tail lift with 815mm alloy platform and fixed leading edge onetwo button external control)
- Additional options available on request via Truckcraft Bodies

Specific Z.E. Equipment

- Z.E. charging socket (right-hand side)
- Z.E. Voice: emits a distinctive range of sounds signalling that the vehicle is moving
- Engine speed limiter 62 mph
- Standard charging cable 32A (IEC 62196 -Type 2 Mennekes) 6m

*For compatible devices, please refer to www.Renault.co.uk/services/multimedia/bletooth-compatibility **Passenger bench not available

For more details about our range of Off-the-shelf and Tailor Made accredited

conversions please see our separate Conversions Range brochure



Upholstery and wheel trims



Kaleido black and grey fabric Standard on Business and Business+



Black and dark carbon Kompo fabric Optional (Not available on Business+ and RWD)

Wheels



16" Steel wheels with small wheel stylers Standard on Business



16" Steel wheels with large wheel stylers Standard on Business+



16" Alloy wheels Optional (FWD only)

Tyres

| | Euro | Euro 6d-Temp emissions standards | | | Euro 6VI emissions standards | | | | |
|-----------------------------|----------------------------------|-------------------------------------|---|-------------------------------------|-------------------------------------|---|---|---|-------------------------------------|
| ТҮРЕ | SUMMER ALL WEATHER | | | SUMMER | | ALL W | EATHER | SUMMER | |
| GVW/Transmission | 2.8 t, 3.3 t and 3.5 t | t/Front-wheel drive | 2.8 t, 3.3 t and 3.5 t/ Front-wheel drive | 3.5 t/Front-wheel drive | 3.5 t/Single wheel rear-wheel drive | 3.5 t and 4.5 t/Twin wheel rear-wheel drive | 2.8 t, 3.3 t and 3.5 t/ Front-wheel drive | 3.5 t and 4.5 t/Twin wheel rear-wheel drive | 3.1 t/Front-wheel drive |
| Tyres | 225/65R16 Bridgestone Duravis | 225/65R16 Continental Vancontact | 225/65R16 Continental Vancontact 4 Seasons | 225/65R16 Continental Vancontact | 235/65R16 Michelin Agilis | 195/75R16 Continental Vancontact | 225/65R16 Continental Vancontact 4 Seasons | 195/75R16 Continental Vancontact 4 Seasons | 215/65R16 Continental Vancontact |
| Consumption class | A | А | В | A | В | В | В | E | A |
| Grip class on wet ground | А | А | А | А | А | А | A | С | А |
| Noise level | 72 dB | 72 dB | 73 dB | 72 dB | 72 dB | 72 dB | 73 dB | 72 dB | 72 dB |

The range

Closed transport

You have a wide range of different needs, which can be met by the wide variety of interior fittings and length x height combinations of Renault MASTER, with a loading volume of between 8 and 20 m³.



FWD Panel van



Crew van

Conversions

Renault MASTER is available in a number of versions, including Tipper, Chassis cab or Platform cabs which are ideal for a number of different conversions.





Tipper

Dropside



RWD Panel van



Box van




Platform cab



Chassis cab

Dimensions

Front-wheel drive panel van

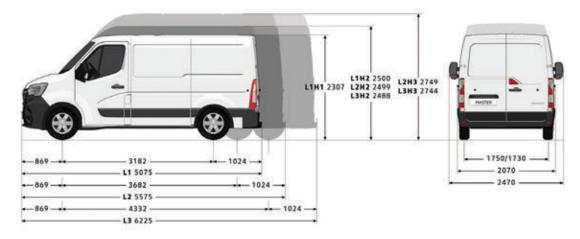

WEIGHTS AND LOADS Front-wheel drive panel van (kg)

| | Effective volume (m ³) | | GVW |
|------|---------------------------------------|---------------------------------|---------------------|
| | | | 3.1 t MASTER Z.E |
| | | Min. kerb weight ⁽¹⁾ | 2,022 |
| L1H1 | 8 | Max. payload (2) | 1,078 |
| LINI | 0 | Max. load on front axle | 1,550 |
| | | Max. load on rear axle | 1,650 |
| | | Min. kerb weight ⁽¹⁾ | 2,050 |
| L1H2 | 9 | Max. payload (2) | 1,050 |
| LIHZ | 9 | Max. load on front axle | 1,650 |
| | | Max. load on rear axle | 1,900 |
| | | Min. kerb weight ⁽¹⁾ | 2,094 |
| L2H2 | 10.8 | Max. payload (2) | 1,006 |
| LZHZ | 10.0 | Max. load on front axle | 1,700 |
| | | Max. load on rear axle | 1,900 |
| | | Min. kerb weight ⁽¹⁾ | 2,175 |
| L3H2 | 13 | Max. payload (2) | 925 |
| LONZ | 1.5 | Max. load on front axle | 1,700 |
| | | Max. load on rear axle | 1,900 |

WEIGHTS AND LOADS Front-wheel drive panel van (kg)


| | Effective volume (m ³) | | GVW | | | | | |
|---------------|---------------------------------------|--------------------------------------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
| | | | 2.8 t Business | 2.8 t Business+ | 3.3 t Business | 3.3 t Business+ | 3.5 t Business | 3.5 t Business+ |
| L1H1 | 8 | Min. kerb weight ⁽¹⁾ | 1,927 | 1,952 | - | - | - | - |
| LIHI | 8 | Max. payload (2) | 873 | 848 | - | - | - | - |
| L1H2 | 9 | Min. kerb weight ⁽¹⁾ | - | - | - | - | 1,949 | - |
| LIHZ | 9 | Max. payload (2) | - | - | - | - | 1,551 | - |
| | | Max. load on front axle | 1,550 | 1,550 | - | - | 1,850 | - |
| | | Max. load on rear axle | 1,650 | 1,650 | - | - | 2,100 | - |
| L1H1/ L1H2 | | Max. towing weight (braked/unbraked) | 2,50 | 0/750 | | | 2,500/750 | - |
| LINZ | | Turning circle, kerb to kerb | 12 | .0 m | | | 12.0 m | - |
| | | Turning circle, wall to wall | .5 m | | | 12.5 m | - | |
| L2H2 | 10.8 | Min. kerb weight ⁽¹⁾ | - | - | 2,021 | 2,046 | 2,021 | 2,046 |
| LZHZ | 10.8 | Max. payload (2) | - | - | 1,279 | 1,254 | 1,479 | 1,454 |
| L2H3 | 12.3 | Min. kerb weight ⁽¹⁾ | - | - | - | - | 2,046 | - |
| LZHJ | 12.5 | Max. payload (2) | - | - | - | - | 1,454 | - |
| | | Max. load on front axle | | - | 1,850 | 1,850 | 1,850 | 1,850 |
| L2H2/ | | Max. load on rear axle | - | - | 2,100 | 2,100 | 2,100 | 2,100 |
| L2H2/ | | Max. towing weight (braked/unbraked) | - | - | | 2,50 | 0/750 | |
| LZIIJ | | Turning circle, kerb to kerb | - | - | | 13. | .6 m | |
| | | Turning circle, wall to wall | - | - | | 14. | .1 m | |
| L3H2 | 13 | Min. kerb weight ⁽¹⁾ | - | - | - | - | 2,116 | 2,141 |
| LJHZ | C1 | Max. payload (2) | - | - | - | - | 1,384 | 1,359 |
| L3H3 | 14.8 | Min. kerb weight ⁽¹⁾ | - | - | - | - | 2,123 | - |
| LJHJ | 14.0 | Max. payload (2) | - | - | - | - | 1,377 | - |
| | | Max. load on front axle | - | - | - | - | 1,850 | 1,850 |
| L3H2/ | | Max. load on rear axle | - | - | - | - | 2,100 | 2,100 |
| L3H2/ | | Max. towing weight (braked/unbraked) | - | - | - | - | 2,500/750 | 2,500/750 |
| 2010 | | Turning circle, kerb to kerb | - | - | - | - | 15.7 m | 13.6m |
| | | Turning circle, wall to wall | - | - | - | - | 16.2 m | 14.1m |

INTERIOR DIMENSIONS Front-wheel drive panel van (mm)

| | L1H1 | L1H2 | L2H2 | L2H3 | L3H2 | L3H3 |
|--------------------------------|---------|-------------|---------|---------|---------|---------|
| Loading area | | | | | | |
| Effective length | 2,5 | 583 | 3,0 |)83 | 3,733 | |
| Effective length at 1.1 m | 2,5 | 530 | 3,0 |)30 | 3,6 | 580 |
| Effective width | | | 1,7 | 765 | | |
| Width between wheel arches | | | 1,3 | 380 | | |
| Effective height | 1,700 | 1,8 | 394 | 2,144 | 1,894 | 2,144 |
| Sliding side door(s) | | | | | | |
| Width of sliding side door(s) | 1,0 | 050 | | 1,2 | 270 | |
| Height of sliding side door(s) | 1,581 | | | 1,780 | | |
| Rear door | | | | | | |
| Width (169 mm from floor) | | 1,580 | | | | |
| Entrance height | 1,627 | 1,627 1,820 | | | | |
| Loading sill (min./max.) | 546/564 | 544/563 | 545/562 | 543/560 | 543/557 | 542/555 |
| Ground clearance (min) | 1 | 82 | 174 | 173 | 172 | 169 |

(1) The kerb weight is the weight of the vehicle without the driver and with the fuel tank filled to 90%. This weight may vary according to the equipment and engine (by up to 330 kg). (2) The payload is calculated as the difference between the Gross Vehicle Weight (GVW) and the kerb weight.

Rear-wheel drive panel van

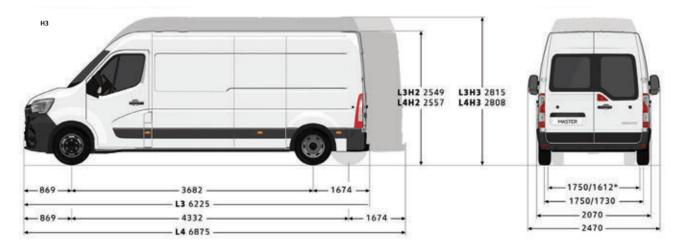

* Twin wheels.

WEIGHTS AND LOADS Rear-wheel drive panel van (kg)

| | Effective volume (m ³) | | | GVW | |
|---------------|--|--------------------------------------|-----------|-----------|----------|
| | | | 3.5 t SW | 3.5 t TW | 4.5 t TW |
| L2H2 Long | 12.4 | Min. kerb weight ⁽¹⁾ | 2,343 | 2,399 | - |
| Overhang | 12.4 | Max. payload ⁽²⁾ | 1,157 | 1,101 | - |
| L3H2 Long | 14.9 | Min. kerb weight ⁽¹⁾ | 2,343 | 2,439 | 2,439 |
| Overhang | 14.9 | Max. payload (2) | 1,157 | 1,061 | 2,061 |
| L3H3 Long | 17 | Min. kerb weight ⁽¹⁾ | 2,390 | 2,510 | 2,510 |
| Overhang | | Max. payload (2) | 1,110 | 990 | 1,990 |
| L2H2 Long | | Max. load on front axle | | 1,850 | |
| Overhang/L3H2 | | Max. load on rear axle | 2,300 | 2,445 | 3,145 |
| Long Overhang | | Max. towing weight (braked/unbraked) | 2,500/750 | 3,00 | 0/750 |
| SW/L3H3 Long | | Turning circle, kerb to kerb 14.1 m | | 13.6-15.7 | |
| Overhang SW | | Turning circle, wall to wall 13.6 m | 14.1-16.2 | | |

(1) The kerb weight is the weight of the vehicle without the driver and with the fuel tank filled to 90%. This weight is given for the basic version and may vary according to the equipment and engine (by up to 330kg), (2) The payload is calculated as the difference between the Gross Vehicle Weight (GWU) and the kerb weight.

INTERIOR DIMENSIONS Rear-wheel drive panel van (mm)


| | L2H2 Long overhang SW | L2H2 Long overhang TW | L3H2 Long overhang SW | L3H2 Long overhang TW | L3H2 Long overhang SW | L3H3 Long overhang TW | |
|-----------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|--|
| Loading area | | | | | | | |
| Effective length | 3,7 | 733 | | 4,3 | 383 | | |
| Effective length at 1.1 m | 3,6 | 580 | | 4,3 | 330 | | |
| Effective width | | | 1,7 | 765 | | | |
| Width between wheel arches | 1,380 | 1,080 | 1,380 | 1,080 | 1,380 | 1,080 | |
| Effective height | 1,7 | 798 | 1,7 | 798 | 2,0 | 2,048 | |
| Sliding side door(s) | | | | | | | |
| Width of sliding side door(s) | | | 1,2 | 270 | | | |
| Height of sliding side door(s) | | | 1,6 | 684 | | | |
| Rear door | | | | | | | |
| Width (169 mm from floor) | | | 1,5 | 580 | | | |
| Entrance height | 1,724 | | | | | | |
| Loading sill (min./max.) | 674/696 | 706/724 | 682/704 | 701/717 | 680/702 | 700/715 | |
| Ground clearance (min) | 197 | 181 | 167 | | | | |

SW: single wheels. TW: twin wheels.

Dimensions

Crew van

FRONT-WHEEL DRIVE

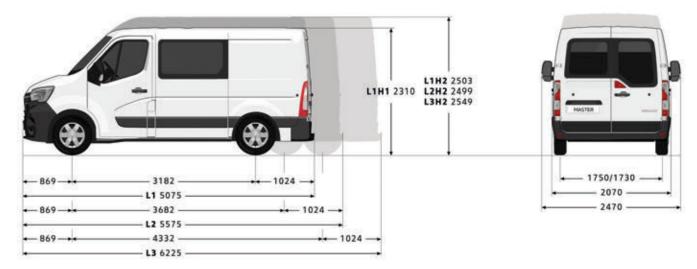

WEIGHTS AND LOADS Crew van (kg)

| | Max. payload | Effective volume m ³ |
|--------------------|-----------------|------------------------------------|
| GVW | 3.5 t | |
| L2H2 FWD Business | 1,274 | 6.9 |
| L3H2 FWD Business | 1,180 | 9 |
| L2H2 FWD Business+ | 1,249 | 6.9 |
| L3H2 FWD Business+ | 1,155 | 9 |

SW: single wheels. TW: twin wheels.

INTERIOR DIMENSIONS Crew van (mm)


| | Front-wheel drive | | | | |
|-------------------------------|-------------------|-------|--|--|--|
| | L2H2 | L3H2 | | | |
| Loading area | | | | | |
| Effective length at 0.4 m | 2,175 | 2,825 | | | |
| Effective length at 1 m | 1,990 | 2,640 | | | |
| Effective width | 1,765 | | | | |
| Width between wheel arches | 1,380 | 1,080 | | | |
| Effective height | 1,894 | 1,798 | | | |
| Sliding side door(s) | | | | | |
| Width of sliding side door(s) | 1,270 | | | | |

INTERIOR DIMENSIONS Crew van (mm) (continued)

| | Front-wheel drive | | | |
|------------------------------------|-------------------|---------|--|--|
| | L2H2 | L3H2 | | |
| Height of sliding side door(s) | 1,780 | 1,684 | | |
| Rear door | | | | |
| Width at the lower part | 1,580 | | | |
| Height | 1,820 | 1,724 | | |
| Loading sill (min./max.) | 545/562 | 543/557 | | |
| Ground clearance | 174 | 172 | | |
| SW/scingle wheels. TW/stwin wheels | | | | |

SW: single wheels. TW: twin wheels.



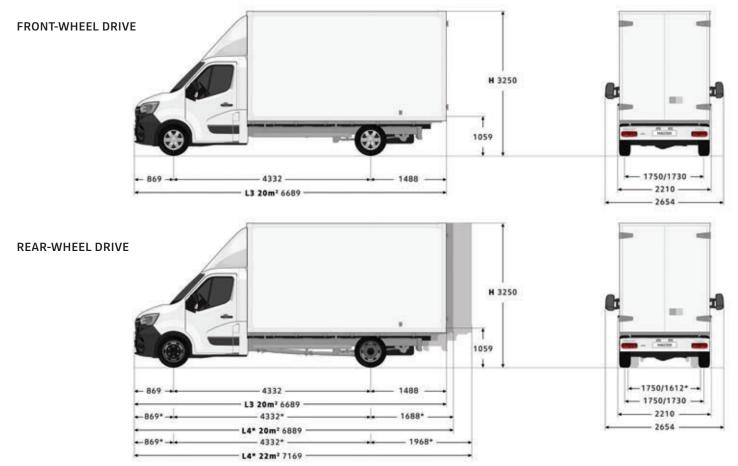

* Twin wheels.

WEIGHTS AND LOADS Box van (kg)

| | Max. payload (kg) | Effective volume m ³ | | |
|--|----------------------|------------------------------------|--|--|
| GVW | 3.5 t | | | |
| L3 Front-wheel drive 20 m ³ | 1,204 | 20.1 | | |
| L3 SW Rear-wheel drive 20 m ³ | 1,061 | 20.1 | | |
| L4 TW Rear-wheel drive 22 m ³ | 902 | 21.7 | | |
| | | | | |

INTERIOR DIMENSIONS Box van (mm) (cont.)

| | Front/Rear-wheel drive box van | | | | | |
|------------------|--------------------------------|-------------------------|--|--|--|--|
| | 20 m ² on L3 | 22 m ² on L4 | | | | |
| Box van module | | | | | | |
| Effective length | 4,170 | 4,650 | | | | |
| Effective width | 2, | 220 | | | | |
| Effective height | 2,200 | | | | | |

INTERIOR DIMENSIONS Box van (mm)


| | Front/Rear-whe | Front/Rear-wheel drive box van | | | | | |
|-----------|---|---|--|--|--|--|--|
| | 20 m ² on L3 (19.6 m ³) | 20 m ² on L4 (20.3 m ³) | | | | | |
| Rear door | | | | | | | |
| Width | 2,1 | 105 | | | | | |
| Height | 2,1 | 2,165 | | | | | |

SW: single wheels. TW: twin wheels.


Dimensions


Tipper

FRONT-WHEEL DRIVE

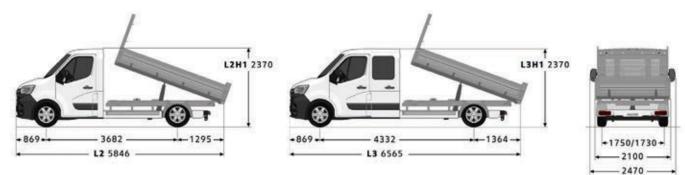

REAR-WHEEL DRIVE



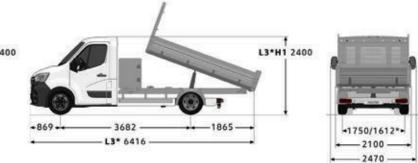

* Twin wheels.

WEIGHTS AND LOADS Tipper (kg)

| | Single cab | Double cab | | |
|--|--------------|------------|--|--|
| | Max. payload | | | |
| GVW | 3.5 t | 3.5 t | | |
| L2 Front-wheel drive with 3.3 m Tipper | 1,217 | - | | |
| L2 SW Rear-wheel drive with 3.3 m Tipper | 1,104 | - | | |
| L2 TW Rear-wheel drive with 3.3 m Tipper | 934 | - | | |
| L3 TW Rear-wheel drive with 3.2 m Tipper + boot | 820 | - | | |
| Double cab L3 SW Rear-wheel drive with 3.3 m Tipper | - | 890 | | |
| Double cab L2 Long Overhang TW Rear-wheel drive with 3.2 m Tipper | - | 825* | | |


DIMENSIONS Tipper (mm)

| | | Single cab Tipper | | | | | |
|------------------------|------|--|--|--------------|------------------|-------|--|
| | | 3.3 m | | 3.2 m + boot | 3.3 m | | |
| | | L2 Front-wheel drive Rear-wheel drive SW SW TW | | | L3 | | |
| | | | | | Rear-wheel drive | | |
| | SW | | | | SW | TW | |
| Effective length | | 3,205 | | | 3,205 | 3,105 | |
| Effective width | | 2,040 | | | | | |
| Side panel height | | 400 | | | | | |
| Euro pallet capacity | | 6 | | | 6 | 5 | |
| Max. rear loading sill | 1,02 | 1,020 1,0 | | | | 1,080 | |


Side panel thickness: 20 mm. Flatbed thickness: 2.5 mm. SW: single wheels. TW: twin wheels.

Dropside

FRONT-WHEEL DRIVE

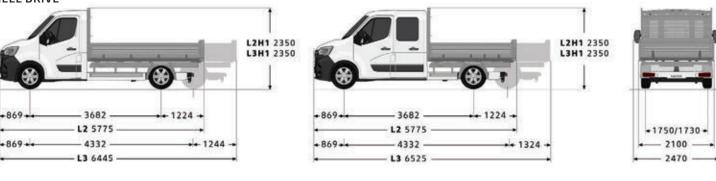


REAR-WHEEL DRIVE



WEIGHTS AND LOADS Dropside (kg)

| Single cab | Double cab | | | |
|--------------|--|--|--|--|
| Max. payload | | | | |
| 3.5 t | 3.5 t | | | |
| 1,401 | - | | | |
| 1,189 | - | | | |
| 1,087 | - | | | |
| 1,328 | 1,208 | | | |
| 1,185 | 1,067 | | | |
| 1,036 | 946 | | | |
| 995 | 852 | | | |
| | Max. p 3.5 t 1,401 1,189 1,087 1,328 1,185 1,185 1,036 | | | |

SW: single wheels. TW: twin wheels.





* Twin wheels.

DIMENSIONS Dropside (mm)

| | | Single cab | | | | | | Double cab | | | |
|----------------------|-------|---|----|---------------------------|----|---------------------|-----------|----------------------|------------------|---------------------|-----------|
| | | L2 Front- wheel Rear-wheel drive drive | | L2 L3 L2 Long overhang | | L3 Long overhang | L3 | | | L3 Long overhang | |
| | wheel | | | Front-wheel drive | | | eel drive | Front-wheel drive | Rear-wheel drive | | eel drive |
| | SW | SW | TW | SW | SW | TW | TW | SW | SW | TW | TW |
| Effective length | | 3,170 | | 3,840 | | 3,720 | 4,370 | 3,170 | | 3,070 | 3,720 |
| Effective width | | 2,040 | | | | | | | | | |
| Side panel height | | 400 | | | | | | | | | |
| Euro pallet capacity | | 5 7 | | | 7 | | 8 | | 5 | | 7 |


Side panel thickness: 20 mm. Flatbed thickness: 3 mm. SW: singles wheels. TW: twin wheels.

Dimensions

Chassis single cab

FRONT-WHEEL DRIVE

REAR-WHEEL DRIVE

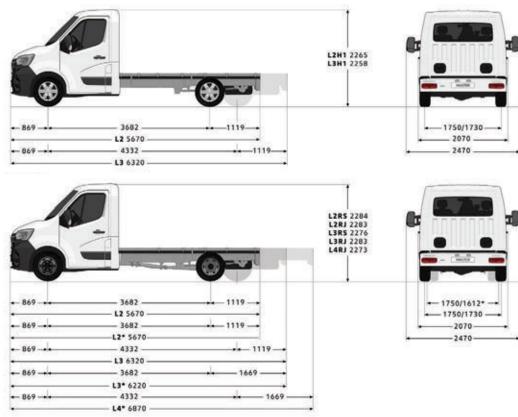

* Twin wheels.

WEIGHTS AND LOADS Chassis single cab (kg)

| | Front-wh | neel drive | Rear-wheel drive | | | | | | |
|---------------------------------|----------|---------------|---|-------|--------|---------------------------|---------------------------|---------------------------|---------------------------|
| | L2 | L3 | L2 SW | L2 TW | L3 SW | L2 Long overhang TW | L2 Long overhang TW | L3 Long overhang TW | L3 Long overhang TW |
| GVW | 3.5 t | 3.5t | 3.5 t | 3.5 t | 3.5 t | 3.5 t | 4.5 t | 3.5 t | 4.5 t |
| Min. kerb weight ⁽¹⁾ | 1,786 | 1,807 | 1,899 | 2,080 | 1,950 | 2,090 | 2,090 | 2,095 | 2,095 |
| Max. payload (2) | 1,714 | 1,693 | 1,601 | 1,420 | 1,550 | 1,410 | 2,410 | 1,405 | 2,405 |
| Max. load on front axle | | 1,850 | | | | | | | |
| Max. load on rear axle | 2,1 | 00 | 2,300 | 2,620 | 2,300 | 2,620 | 3,200 | 2,620 | 3,200 |
| Max. towing weight | | 2,500/ 750 | 3,000/ 2,500/ 3,000/ 750 750 750 750 | | | | | | |
| Turning circle, kerb to kerb | 13.6 m | 15.7 m | 13.6 m | | | | 15. | 7 m | |
| Turning circle, wall to wall | 14.1 m | 16.2 m | | | 14.1 m | | | 16. | 2 m |

DIMENSIONS Chassis single cab (mm)


| | Front-wi | neel drive | Rear-wheel drive | | | | |
|---|----------------------------|-----------------|------------------|-----------------|-----------------|---------------------------|---------------------------|
| | L2 | L3 | L2 SW | L2 TW | L3 SW | L2 Long overhang TW | L3 Long overhang TW |
| Maximum body length | 5,670 | 6,320 | 5,670 | 5,670 | 6,320 | 6,220 | 6,870 |
| Effective body length (min./max.) | 3,184/ 3,466 | 3,834/ 4,840 | 3,184/ 4,295 | 3,184/ 4,276 | 3,834/ 4,926 | 3,734/ 4,275 | 4,384/ 5,470 |
| Side member sill height | 735/ 740 | 736/ 741 | 771/ 774 | 784/ 787 | 771/ 775 | 784/ 787 | 786/ 789 |
| Width with extended door mirrors | xtended door mirrors 2,654 | | | | | | |
| Max. effective body width (standard/ extended repeaters) | 2,170/2,350 | | | | | | |
| Ground clearance (min) | | | | 166 | | | |

(1) The kerb weight is the weight of the vehicle without the driver and with the fuel tank filled to 90%. This weight is given for the basic version and may vary according to the equipment and engine (by up to 330kg). (2) The payload is calculated as the difference between the Gross Vehicle Weight (GWV) and the kerb weight. SW: single wheels. TW: twin wheels.

Chassis double cab

FRONT-WHEEL DRIVE

REAR-WHEEL DRIVE

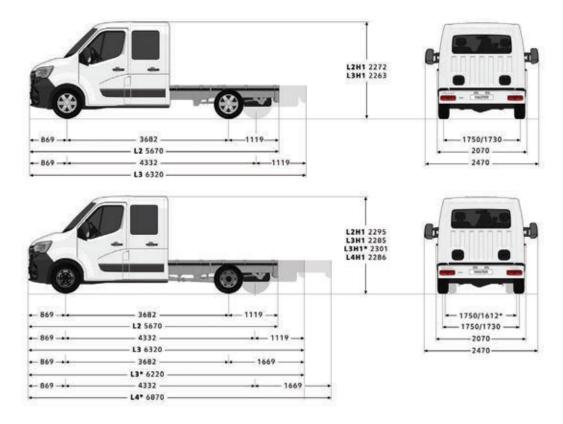

* Twin wheels.

WEIGHTS AND LOADS Chassis double cab (kg)

| | Front-wh | neel drive | Rear-wh | eel drive | | |
|---------------------------------------|-------------|------------|-----------|------------------|--|--|
| | L2 | L3 | L3 | L3 Long overhang | | |
| GVW | 3.5 t | 3.5 t | 3.5 t TW | 3.5 t TW | | |
| Min. kerb weight ⁽¹⁾ | 1,971 | 1,979 | 2,245 | 2,294 | | |
| Max. payload (2) | 1,529 1,521 | | 1,255 | 1,206 | | |
| Max. load on front axle | | 1,850 | | | | |
| Max. load on rear axle | 2,100 | | 2,620 | 2,620 | | |
| Max. towing weight braked/unbraked | 2,50 | 0/750 | 3,000/750 | | | |
| Turning circle, kerb to kerb | 13.6 m | 15.7 m | 13.6 m | 15.7 m | | |
| Turning circle, wall to wall | 14.1 m | 16.2 m | 14.1 m | 16.2 m | | |


DIMENSIONS Chassis double cab (mm)

| | Front-wi | neel drive | | |
|---|-----------------|-----------------|-----------------|------------------------|
| | L2 | L3 | L3 TW | L3 Long overhang TW |
| Maximum body length | 5,670 | 6,320 | 6,220 | 6,870 |
| Effective body length (min./max.) | 2,434/ 2,516 | 3,084/ 4,044 | 2,985/ 3,416 | 3,635/ 4,436 |
| Side member sill height (min./max.) | 727/732 | 731/736 | 775/780 | 778/781 |
| Width with extended door mirrors | 2,654 | | | |
| Maximum effective body width (with standard/extended repeater) | 2,170/2,350 | | | |
| Ground clearance (min) | 1 | 69 | 1 | 67 |

(1) The kerb weight is the weight of the vehicle without the driver and with the fuel tank filled to 90%. This weight is given for the basic version and may vary according to the equipment and engine (by up to 330kg). (2) The payload is calculated as the difference between the Gross Vehicle Weight (GVW) and the kerb weight. SW: single wheels. TW: twin wheels.

Dimensions

Platform cab

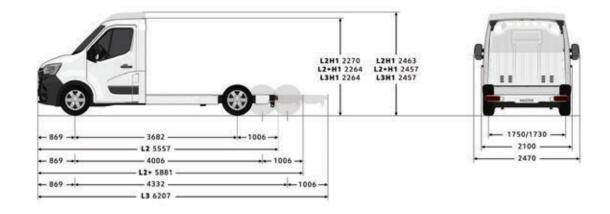

WEIGHTS AND LOADS Platform cab (kg)

| | Z.E. L2H1 Front -wheel drive | L2H1 Front-wheel drive | Z.E. L3H1 Front -wheel drive | L3H1 Front-wheel drive |
|------------------------------------|------------------------------------|------------------------------|------------------------------------|------------------------------|
| GVW | 3.1t | 3.5 t | 3.1t | 3.5t |
| Min. kerb weight ⁽¹⁾ | 1,773 | 1,717 | 1,795 | 1,725 |
| Max. payload ⁽²⁾ | 1,327 | 1,783 | 1,305 | 1,775 |
| Max. load on front axle | 1,700 | 1,850 | 1,700 | 1,850 |
| Max. load on rear axle | 1,900 | 2,100 | 1,900 | 2,100 |
| Max. towing weight braked/unbraked | 0/0 | 2,500/750 | 0/0 | 2,500/750 |
| Turning circle, kerb to kerb | 13.6m | 13.6 m | 15.7m | 15.7 m |
| Turning circle, wall to wall | 16.2m | 14.1 m | 16.2m | 16.2 m |

DIMENSIONS Platform cab (mm)

| | L2H1 | L3H1 | |
|---|-----------------|-------------|--|
| Maximum body length | 5,557 | 6,207 | |
| Effective body length (min./max.) | 3,091/3,313 | 3,741/4,583 | |
| Maximum effective body width (with standard/extended repeater) | 2,170/2,350 | | |
| Width with extended door mirrors | 2,654 | | |
| Floor sill height (min./max.) | 581/585 579/583 | | |
| Ground clearance (min) | 166 | | |

(1) The kerb weight is the weight of the vehicle without the driver and with the fuel tank filled to 90%. This weight is given for the basic version and may vary according to the equipment and engine (by up to 330kg). (2) The payload is calculated as the difference between the Gross Vehicle Weight (GVW) and the kerb weight.

Luton Low Loader

WEIGHTS AND LOADS Luton Low Loader (kg)

| | L3H1 Front-wheel drive |
|------------------------------------|---------------------------|
| GVW | 3.5t |
| Min. kerb weight ⁽¹⁾ | 2,262 |
| Max. payload (2) | 1,238 |
| Max. load on front axle | 1,850 |
| Max. load on rear axle | 2,100 |
| Max. towing weight braked/unbraked | 2,500/750 |


DIMENSIONS Luton Low Loader (mm)

| | L3H1 |
|--|-------|
| Maximum body length | 6,700 |
| Maximum effective body width (without door mirrors) | 2,070 |
| Width with door mirrors | 2,470 |
| Interior height | 2,200 |
| Overall height (unladen) | 2,840 |
| Cargo area length | 4,150 |
| Maximum loading area width | 2,036 |

(1) The kerb weight is the weight of the vehicle without the driver and with the fuel tank filled to 90%. This weight is given for the basic version and may vary according to the equipment and engine (by up to 330 kg). (2) The payload is calculated as the difference between the Gross Vehicle Weight (GVW) and the kerb weight.



Options









1. LED loadspace lighting (at the rear and near the sliding side door) provide more white and intense light to optimise your working conditions.

2. Reversing camera: With information fed back onto the MediaNav multimedia system (when specified) or interior rear-view mirror (when MediaNav is not specified).

3. Tablet holder: The digital tablet holder is ideally placed above the radio on the dashboard. This system is suitable for a wide range of tablets of varying sizes. The holder can be used horizontally and vertically.

4. MediaNav multimedia system: Stay connected thanks to Renault MASTER's multimedia systems and Renault Easy Connect services. MediaNav Evolution has smartphone integration so you can use your favourite applications on the large touchscreen on the dashboard.

5. Upgrade your passenger compartment: The chrome air vents and the chrome gear knob provide a technical finish. The air conditioning with its electronic display allows the temperature to be adjusted to the nearest degree. Finally, the better quality Kompo upholstery will meet the expectations of the most demanding customers.



Accessories



1. Roof bars: Very practical for transporting professional equipment and all other bulky loads. These roof bars meet all safety and quality standards and are available in either a set of 2 bar (maximum load: 89.5kg) or 4 bars (maximum load: 181.5kg).

2. Rubber floor mats: These waterproof and easy-tomaintain mats ensure total protection for the floor of your MASTER. They are quick to attach using 2 safety clips and come in packs of 2 or 4.


3. Loading pack: Essential for easy access to the roof. Pack includes the steel ladder, mounted inside the door for a better hold, and the aluminium roof rack, supplied with rear roller for easy loading.

4. Kenwood Dashcam: The Kenwood DVR-A501W dashcam is a great addition for added security and reassurance on the road. The on-board camera automatically starts recording a soon as the vehicle ignition is switched on. The dashcam is designed to give drivers peace of mind, as video footage is widely accepted and used for insurance claims. The pack includes a GPS integrated dashboard camera, touch panel control and parking mode recording.

5. Rear parking sensors: Makes parking easier by detecting any obstacles behind your vehicle and issuing an audible alert.


For more information, consult the MASTER accessories brochure. For prices, please refer to Renault Van Price Guide.

Accessories are fitted post-production, and may have an impact on real world fuel (actual) consumption and $\rm CO_2$ figures.









Engines



As part of application of the Euro 6d-temp emission standard, MASTER has modernised its range of engines. Benefits: a 100% Twin Turbo range, more power (up to +10 hp), more torque (up to +40 Nm) for new driving pleasure and better acceleration. All of this significantly reduces fuel consumption and CO_2 emissions. Example: the dCi 135 hp Twin Turbo gains 5 hp, +40 Nm whilst reducing its consumption by up to 15% in combined cycle (NEDC-BT)⁽¹⁾ enabling a net improvement in the total cost of ownership.

How do I choose?

- On rear-wheel drive models the Euro VI Emission standard engine range meets your expectations with the dCi 130, ENERGY dCi 145.
- On Front Wheel Drive models (non converted versions), the ENERGY dCi 150 and 180 versions can be combined with a 6-speed automatic gearbox.
- Let's also remind you of the electric engine of MASTER Z.E., ideal for urban last mile delivery the last mile.

High-performance and more efficient engines

"Twin Turbo" technology


It enables a diesel engine to combine torque at low speeds and high power with immediate benefit to driving pleasure. It incorporates two standard-mounted turbochargers:


 the first turbo provides high torque from low speeds to give you greater responsiveness when pulling away and restarting;


- the second turbo takes over at higher speeds, letting you use more power without running out of steam for smooth, steady, linear acceleration.

Euro 6/VI and AdBlue®

The new range has the SCR (catalytic reduction system) enabling all of our engines to significantly reduce NOx emissions by injecting a liquid called AdBlue[®]. AdBlue[®] is a liquid, non-toxic, non-flammable and water-based solution, which is injected at the start of the exhaust system not line. This significantly reduces pollutant emissions while preserving the performance of our engines. The AdBlue[®] tank is located under the body at the front and is filled via a flap which is located on the right side of the vehicle (can be filled from a bottle, or HGV AdBlue[®] pump in service stations).







Technical specification

| | | Euro 6d-Temp | | | | | | |
|---|--|--------------|-----------|---------------------------------------|---|-------|---------------------------------------|--|
| | dCi 135 BVM6 N1 | | | ENERGY dCi 150 BVM6/BVR6* N1 | | | ENERGY dCi 180 BVM6/BVR6* N1 | |
| Power (hp/kW) | 135 | | 15 | 0/110 | 18 | 0/132 | | |
| Stop & Start | Ν | | Ň | Yes | | Yes | | |
| Engine speed at max. power (rpm) | 3,500 | | | 3,500 | | | 3,500 | |
| Torque (N.m) | 360 | | 385 | | | 400 | | |
| Engine speed at max. torque (rpm) | 1,500 | | 1,500 | | | 1,500 | | |
| Top speed (mph) | ç | 94 | 97 | | | 103 | | |
| 0-62 mph (s) | 13 | 3.5 | 12.1 | | | 11.3 | | |
| Type of bodywork | FWD vans and crew vans, non-converted non-converted cabs and FWD panel vans | | | vans, nverted | Converted chassis cabs, tippers, dropside, platform cabs and FWD panel vans | | D vans, onverted | |
| | | | BVM6 | BVR6* | | BVM6 | BVR6* | |
| | | | | WI | _TP ⁽¹⁾ | | | |
| Combined fuel consumption (mpg) | 32.5-29.1 | 22.8 | 31.0-29.4 | 31.4-28.5 | 23.0 | 29.4 | 29.4 | |
| CO ₂ emissions (g/km) (combined cycle) | 230-255 | 327 | 240-252 | 235-260 | 323 | 252 | 252 | |

(1) WLTP figures shown are for comparability purposes; only compare figures with vehicles tested to the same technical procedures. Actual real world driving results may vary depending on factors such as weather conditions, driving styles, vehicle load or any accessories fitted after registration. WLTP is a new test used for fuel consumption and CO₂ figures. Please visit renault.co.uk/configure for WLTP figures for any selected options. *BVR6 automatic gearbox engine data.

| | ENERGY dCi 145 | dCi 130 | ENERGY dCi 145 |
|---|------------------------------|------------------------------|------------------------------|
| Type of bodywork | All FWD Vans and Conversions | All RWD Vans and Conversions | All RWD Vans and Conversions |
| Certification category | N1 | N1 | N1 |
| Wheels | SW | TW | TW |
| Power (hp/kW) | 145/107 | 130/96 | 145/107 |
| Stop & Start | Yes | No | Yes |
| Engine speed at max. power (rpm) | 3,500 | 3,500 | 3,500 |
| Torque (N.m) | 360 | 330 | 360 |
| Engine speed at max. torque (rpm) | 1,500 | 1,500 | 1,500 |
| Top speed (mph) | 95 | 92 | 93 |
| | | WLTP (1) | |
| Combined cycle consumption (mpg) | 22.8 - TBC | TBC | 32.8 - TBC |
| CO ₂ emissions (g/km) (combined cycle) | 327 - TBC | TBC | 224 - TBC |

(1) WLTP figures shown are for comparability purposes; only compare figures with vehicles tested to the same technical procedures. Actual real world driving results may vary depending on factors such as weather conditions, driving styles, vehicle load or any accessories fitted after registration. WLTP is a new test used for fuel consumption and CO₂ figures. Please visit renault.co.uk/configure for WLTP figures for any selected options.

MASTER van

MASTER VAN - PANEL VAN

| VERSIONS | WLTP CO ₂ (g/km) ⁺ | Combined fuel consumption (mpg) ⁺ | Load volume (m ³) | Max. payload (kg) |
|---|--|---|-------------------------------|-------------------|
| BUSINESS | | | | |
| L1H1 | | | | |
| FWD SL28 dCi 135 Business MY19 | 230 | 32.5 | 8.0 | 873 |
| FWD SL28 ENERGY dCi 150 Quickshift6 Business MY19 | 235 | 31.4 | 8.0 | 873 |
| L1H2 | | | | |
| FWD SM35 dCi 135 Business MY19 | 244 | 30.4 | 9.0 | 1551 |
| FWD SM35 ENERGY dCi 150 Quickshift6 Business MY19 | 249 | 29.7 | 9.0 | 1551 |
| L2H2 | | | | |
| FWD MM33 dCi 135 Business MY19 | 243 | 30.7 | 10.8 | 1279 |
| FWD MM33 ENERGY dCi 150 Business MY19 | 240 | 31.0 | 10.8 | 1279 |
| FWD MM35 dCi 135 Business MY19 | 245 | 30.4 | 10.8 | 1479 |
| FWD MM35 ENERGY dCi 150 Business MY19 | 242 | 31.0 | 10.8 | 1479 |
| FWD MM35 ENERGY dCi 150 Quickshift6 Business MY19 | 250 | 29.7 | 10.8 | 1479 |
| L2H3 | | | | |
| FWD MH35 dCi 135 Business MY19 | 253 | 29.4 | 12.3 | 1454 |
| FWD MH35 ENERGY dCi 150 Business MY19 | 250 | 29.7 | 12.3 | 1454 |
| L2H2 LONG OVERHANG | | | | |
| RWD MML35 dCi 130 Business MY19 | 224(1) | 32.8(1) | 12.4 | 1157 |
| RWD MML35TW ENERGY dCi 145 Business MY19 | 225(1) | 32.8(1) | 12.4 | 1101 |
| L3H2 | | 52.0 | 12.7 | 1101 |
| FWD LM35 dCi 135 Business MY19 | 247 | 30.1 | 13.0 | 1384 |
| FWD LM35 ENERGY dCi 150 Business MY19 | 244 | 30.4 | 13.0 | 1384 |
| FWD LM35 ENERGY dCi 150 Duickshift6 Business MY19 | 252 | 29.4 | 13.0 | 1384 |
| FWD LM35 ENERGY dCi 130 Business MY19 | 252 | 29.4 | 13.0 | 1384 |
| FWD LM35 ENERGY dCi 180 Quickshift6 Business MY19 | 252 | 29.4 | 13.0 | 1384 |
| L3H3 | 232 | 27.4 | 15.0 | 1364 |
| | 255 | 29.1 | 14.8 | 1377 |
| FWD LH35 dCi 135 Business MY19 FWD LH35 ENERGY dCi 150 Business MY19 | 255 | 29.1 | 14.8 | 1377 |
| | 252 | 29.4 | 14.8 | |
| FWD LH35 ENERGY dCi 150 Quickshift6 Business MY19 | 260 | 28.5 | 14.8 | 1377 |
| L3H2 LONG OVERHANG | 224(1) | 22.0(1) | 440 | 4457 |
| RWD LML35 dCi 130 Business MY19 | 224(1) | 32.8(1) | 14.9 | 1157 |
| RWD LML35 ENERGY dCi 145 Business MY19 | 211(1) | 34.9(1) | 14.9 | 1157 |
| RWD LML35TW ENERGY dCi 145 Business MY19 | TBC | TBC | 14.9 | 1061 |
| RWD LML45TW ENERGY dCi 145 Business MY19 | ТВС | ТВС | 14.9 | 2061 |
| L3H3 LONG OVERHANG | | | | |
| RWD LHL35 dCi 130 Business MY19 | 224(1) | 32.8(1) | 17.0 | 1110 |
| RWD LHL35 ENERGY dCi 145 Business MY19 | ТВС | TBC | 17.0 | 1110 |
| RWD LHL35TW ENERGY dCi 145 Business MY19 | ТВС | TBC | 17.0 | 990 |
| RWD LHL45TW ENERGY dCi 145 Business MY19 | 224(1) | 32.8(1) | 17.0 | 1990 |
| BUSINESS+ | | | | |
| L1H1 | | | | |
| FWD SL28 dCi 135 Business+ MY19 | 230 | 32.1 | 8.0 | 848 |
| L2H2 | | | | |
| FWD MM33 dCi 135 Business+ MY19 | 244 | 30.4 | 10.8 | 1254 |
| FWD MM35 dCi 135 Business+ MY19 | 246 | 30.1 | 10.8 | 1454 |
| FWD MM35 ENERGY dCi 150 Business+ MY19 | 243 | 30.4 | 10.8 | 1454 |
| FWD MM35 ENERGY dCi 150 Quickshift6 Business+ MY19 | 251 | 29.4 | 10.8 | 1454 |
| L3H2 | | | | |
| FWD LM35 dCi 135 Business+ MY19 | 249 | 29.7 | 13.0 | 1359 |
| FWD LM35 ENERGY dCi 150 Business+ MY19 | 246 | 30.4 | 13.0 | 1359 |
| FWD LM35 ENERGY dCi 150 Quickshift6 Business+ MY19 | 254 | 29.1 | 13.0 | 1359 |

MASTER CREW VAN - 7 SEATS

| WLTP CO ₂ (g/km) [†] | Combined fuel consumption (mpg) † | Load volume (m ³) | Max. payload (kg) |
|--|--|--|--|
| | | | |
| | | | |
| 249 | 29.7 | 6.9 | 1274 |
| | | | |
| 252 | 29.4 | 9.0 | 1180 |
| | | | |
| | | | |
| 250 | 29.7 | 6.9 | 1249 |
| | | | |
| 253 | 29.4 | 9.0 | 1155 |
| | 249 252 250 | 249 29.7 252 29.4 250 29.7 | 249 29.7 6.9 252 29.4 9.0 250 29.7 6.9 |

MASTER Z.E. PANEL VAN - BUSINESS - BATTERY FULL PURCHASE

| VERSIONS | WLTP CO ₂ (g/km) ⁺ | Power unit output kW (bhp) | Load volume (m ³) | Max. payload (kg) |
|-------------------------------|--|-------------------------------|-------------------------------|-------------------|
| L1H1 | | | | |
| FWD SL31 i Z.E. Business MY19 | 0 | 57 (76) | 8.0 | 1078 |
| L1H2 | | | | |
| FWD SM31 i Z.E. Business MY19 | 0 | 57 (76) | 9.0 | 1050 |
| FWD SM35 i Z.E. Business MY20 | 0 | 57 (76) | 9.0 | 1425 |
| L2H3 | | | | |
| FWD MM31 i Z.E. Business MY19 | 0 | 57 (76) | 10.8 | 1006 |
| FWD MM35 i Z.E. Business MY20 | 0 | 57 (76) | 10.8 | 1381 |
| L3H2 | | | | |
| FWD LM31 i Z.E. Business MY19 | 0 | 57 (76) | 13.0 | 925 |
| FWD LM35 i Z.E. Business MY20 | 0 | 57 (76) | 13.0 | 1300 |

† WLTP figures shown are for comparability purposes; only compare figures with vehicles tested to the same technical procedures. Actual real world driving results may vary depending on factors such as weather conditions, driving styles, vehicle load or any accessories fitted after registration. WLTP is a new test used for fuel consumption and CO₂ figures. Please visit renault.co.uk/configure for WLTP figures for any selected options. (1) Heavy Duty engine homologated and tested to NEDC protocol.

MASTER options

| PandsPand Z.OresPand Z.OresOresBASICS0000Attribute on parsenger, from tarker (on (fiftwer an parsenger) and single parsenger scal (hugh squitzbaid) will be the state of the state | | | | FWD | FWD | | | | |
|---|---|-------|------------|------|-------|-------|------------------|--|--|
| BASIS: Interaction process from process fro | | | Business | | Busir | iess+ | Business | | |
| Altage instruction proving intermed proving instruction in super searce (in eight add) instruction (intermed proving instruction in the searce of | | Panel | Panel Z.E. | Crew | Panel | Crew | Panel | | |
| Alting: <td>BASICS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> | BASICS | | | | | | | | |
| Lamba alsophical - | Airbag - front passenger | 0 | - | 0 | 0 | 0 | 0 | | |
| Air starpform ¹⁰¹ Air starpform ¹⁰¹ Air starp interface and Air starpform Air Air Air and Air | Airbag - front passenger, front lateral curtain (driver and passenger) and single passenger seat (height adjustable) with | 0 | - | - | 0 | - | 0 | | |
| Batter Data00000Bigit I througe and CM interface unit?00000Bigit I througe and CM interface unit?00 <td></td> <td>0</td> <td></td> <td>0</td> <td>0</td> <td>0</td> <td></td> | | 0 | | 0 | 0 | 0 | | | |
| CAN instruct0-000Eigne sequencer (Seen)NV00m DR 20nph/100mh DR 80nph/110mh DR 90nph/130mh)"0-000Key - additional (Mind Leen (Seen)NV00m DR 20nph/130mh)"000000Key - additional (Mind Leen (Seen)NV00m DR 20nph/130mh) (Mind Leen (Seen)NV00m DR 20nph/130mh)00 | | | 0 | | | | 0 | | |
| DigetsDiget | | | | | | | 0 | | |
| Endpres galantier (Samph/10kmh 0R & Branch/10kmh 0R & Branch/10kmh 0R B (Branch/10kmh)**0000Key - Batter hand, Nerkey000 | | | - | | | | 0 | | |
| part land. 10% lines0000Key - 2 dittor hands fee key00000Key - 2 dittor hands fee key000000Key - 2 dittor hands fee key00 </td <td></td> <td></td> <td>-</td> <td>0</td> <td>0</td> <td></td> <td>0</td> | | | - | 0 | 0 | | 0 | | |
| Circle | | | - | | | | 0 | | |
| Series Journal Name 0 0 0 0 0 Muditap front and real 0 0 0 0 0 Muditap front and real 0 | Key - additional (third) key | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Locking differentialPower take of * gents "1"00 </td <td>Key - 2 button hands free key</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> | Key - 2 button hands free key | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Multilisy front and read00000Power take of - regar tow ***00000Power take of - regar tow ***000000Bern force of Battery ***00 | Key - 3 button key | 0 | 0 | 0 | • | • | 0 | | |
| Description00000Bear step00 </td <td>Locking differential</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>0</td> | Locking differential | - | - | - | - | - | 0 | | |
| Paper tand f ⁻ genths (¹⁰⁰ - | Mudflaps (front and rear) | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Rest segn O O O O O O Sinder pack O O O O O O Sinder pack O O O O O O CONNECTIVITY C O O O O O O Var power point in load area O O O O O O O O O Var power point in load area O | Power take off - engine (1) (9) | 0 | - | 0 | - | - | 0 | | |
| Reinforce flattery ⁽¹⁾ O O O O O Smoker pack O O O O O O O CONNECTIVITY O <td>Power take off - gearbox (10)</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>0</td> | Power take off - gearbox (10) | - | - | - | - | - | 0 | | |
| Smake pak O O O O O CONNECTIVIT CONNECTIVIT Construction of the date and t | Rear step | 0 | 0 | 0 | 0 | 0 | • | | |
| CONNECTIVITY C2V power point in load area C <td>Reinforced Battery⁽¹¹⁾</td> <td>0</td> <td>•</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> | Reinforced Battery ⁽¹¹⁾ | 0 | • | 0 | 0 | 0 | 0 | | |
| 12V power point in lad area00 <td>Smoker pack</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> | Smoker pack | 0 | 0 | 0 | 0 | 0 | 0 | | |
| 12V pewer point in lead area!0000000Wednaw multimedia system?" To trochscreen Ayate navigation.000 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> | | | | | | | | | |
| MediaNar multimedia system: 7" touchscreen, Navteq navigation, WAM/DAB ture, 32:0W spackers, Bluetooth® hads-free calls, o o o o o USB and ALX sockers?" 0 </td <td></td> <td>0</td> <td>0</td> <td>0</td> <td>•</td> <td>•</td> <td>0</td> | | 0 | 0 | 0 | • | • | 0 | | |
| Cruise control with speed limiter 0 0 0 0 0 Driver's seat - fully adjustable suspenion type (12/4) 0 0 0 0 0 0 Kompo upholstery 0 | MediaNav multimedia system: 7" touchscreen, Navteq navigation, FM/AM/DAB_tuner, 2x20W speakers, Bluetooth® hands-free calls, | 0 | - | O | 0 | 0 | 0 | | |
| Driver's seat - fully adjustable suspension type ^{1110/41} 0 0 </td <td>OMFORT</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> | OMFORT | | | | | | | | |
| Electric front windows (driver's side 'one touch' descending) 0 | | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Kompo upholistery O | Driver's seat - fully adjustable suspension type (13)(24) | 0 | 0 | 0 | • | 0 | 0 | | |
| Manual air conditioning with pollen filter 0< | Electric front windows (driver's side 'one touch' descending) | 0 | 0 | 0 | • | • | 0 | | |
| Passenger's seat - height-adjustable single seat with armrest 0 | Kompo upholstery | 0 | 0 | 0 | - | - | - | | |
| Passenger's seat - height-adjustable with lumbar adjustment single seat ^[21] 0 0 0 0 0 0 Pivoting seatback table (^{13] (22)} 0 0 0 0 0 0 Driving pack: cruise control with speed limiter, air conditioning with pollen filter, one-touch electric front windows 0 0 0 0 0 0 PACTECT - - 0 | Manual air conditioning with pollen filter | 0 | 0 | 0 | • | • | 0 | | |
| Pivoting seatback table (************************************ | | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Phyoting seatback table with dual split underseat storage compartment ^{(13) (22)} 0 < | Passenger's seat - height-adjustable with lumbar adjustment single seat ⁽²¹⁾ | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Driving pack: cruise control with speed limiter, air conditioning with pollen filter, one-touch electric front windowso-o-o-oPROTECTAdvanced emergency braking system ⁽²³⁾ oo <t< td=""><td>0</td><td>0</td><td>0</td><td>•</td><td>0</td><td>0</td><td>0</td></t<> | 0 | 0 | 0 | • | 0 | 0 | 0 | | |
| PACTECT Advanced emergency braking system ^[23] 0 - 0 0 0 2 Additional anchorage points in loading area, weight allowed per anchorage point: approximately 500kg 0 | | 0 | 0 | 0 | • | • | 0 | | |
| Advanced emergency braking system (23)oooooo2 Additional anchorage points in loading area, weight allowed per anchorage point: approximately 500kgooo </td <td>Driving pack: cruise control with speed limiter, air conditioning with pollen filter, one-touch electric front windows</td> <td>0</td> <td>-</td> <td>0</td> <td>-</td> <td>-</td> <td>0</td> | Driving pack: cruise control with speed limiter, air conditioning with pollen filter, one-touch electric front windows | 0 | - | 0 | - | - | 0 | | |
| 2 Additional anchorage points in loading area, weight allowed per anchorage point: approximately 500kg00 <th< td=""><td>PROTECT</td><td></td><td></td><td></td><td></td><td></td><td></td></th<> | PROTECT | | | | | | | | |
| Blind spot warning0-0Bulkhead - full steel with glazing00 | Advanced emergency braking system (23) | 0 | - | 0 | 0 | 0 | 0 | | |
| Bulkhead - full steel with glazingo-ooooIncreased idle speed ⁽¹⁴⁾ ooo< | 2 Additional anchorage points in loading area, weight allowed per anchorage point: approximately 500kg | 0 | 0 | 0 | 0 | 0 | 0 | | |
| ncreased idle speed (¹⁴⁾ 0 - 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | Blind spot warning ⁽²⁰⁾ (26) | 0 | - | 0 | - | - | 0 | | |
| LED loadspace lightingoooooooRear parking camera with rear parking sensorsooo | | 0 | - | - | 0 | - | 0 | | |
| Rear parking camera with rear parking sensors000000Front parking sensors (Inc. rear sensors)00000000Front parking sensors (Inc. rear sensors) with rear parking camera00 </td <td>Increased idle speed⁽¹⁴⁾</td> <td>0</td> <td>-</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> | Increased idle speed ⁽¹⁴⁾ | 0 | - | 0 | 0 | 0 | 0 | | |
| Front parking sensors (Inc. rear sensors)oo | | | 0 | | | | 0 | | |
| Front parking sensors (Inc. rear sensors) with rear parking cameraooooooParking pack 1: front & rear parking sensors plus cruise control & wide view mirroro-o <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0</td> | | | | | | | 0 | | |
| Parking pack 1: front & rear parking sensors plus cruise control & wide view mirroro-oo-oo-oo <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td>0</td></t<> | | | | | | | 0 | | |
| Parking pack 2: front & rear parking sensors, rear parking camera plus cruise control & wide view mirror o - o - | | | | | | | 0 | | |
| Parking pack 3: front & rear parking sensors plus cruise control, wide view mirror & blind spot warningo-o-o-Parking pack 4: front & rear parking sensors, rear parking camera plus cruise control, wide view mirror & blind spot warningo-o-o-o-o-oo | | | | | | | 0 ⁽⁸⁾ | | |
| Parking pack 4: front & rear parking sensors, rear parking camera plus cruise control, wide view mirror & blind spot warning o - o - <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0⁽⁸⁾</td> | | | | | | | 0 ⁽⁸⁾ | | |
| Rear parking sensors 0 0 0 0 Resin coated plywood floor 0 0 0 0 | | | | | | | 0 ⁽⁸⁾ | | |
| Resin coated plywood floor O O O O | | | | | | | 0(8) | | |
| | | | | | | | 0 | | |
| Rear View Assist Camera (Does not function when vehicle is reversing) 0 - 0 0 0 | | | | | | | 0 | | |
| | | | - | 0 | 0 | 0 | 0 | | |
| Ply lining - full height ply lined side panels and floor - ply lined with resin coating (3) 0 - 0 0 0 0 0 0 0 0 | | | - | | | | 0 | | |

| | | | FWD | | | RWD |
|---|-------|------------|------|-------|-------|----------|
| | | Business | | Busir | less+ | Business |
| | Panel | Panel Z.E. | Crew | Panel | Crew | Panel |
| Towing capacity - Twin wheel heavy duty option : Increase to 3,500 kg ^{(8) (17)} | - | - | - | - | - | 0 |
| Tyre pressure monitoring system | 0 | 0 | 0 | 0 | 0 | - |
| Wide view mirror | 0 | 0 | 0 | • | • | 0 |
| 4x4 ⁽⁴⁾ | - | - | - | - | - | 0 |
| Lane departure warning system & Automatic headlight high/ low beam (25) (26) | 0 | - | 0 | 0 | 0 | 0 |
| STYLE | | | | | | |
| 16" alloy wheels ⁽¹⁹⁾ | 0 | - | 0 | 0 | 0 | - |
| 16" steel wheels with large wheel stylers ⁽¹⁵⁾ | 0 | 0 | 0 | • | • | 0 |
| All-weather tyres (6) (16) | 0 | - | 0 | 0 | 0 | 0 |
| Metallic paint | 0 | 0 | 0 | 0 | 0 | 0 |
| _Tow bar | 0 | - | 0 | 0 | 0 | 0 |
| Front fog lights | 0 | - | 0 | 0 | 0 | - |
| ELECTRIC | | | | | | |
| EVSE Cable for 10 amp charging using domestic 3-pin plug | | 0 | - | - | - | - |
| My Z.E. Connect - 3 year renewal subscription (one year free subscription) (13) | - | 0 | - | - | - | - |

(1) RWD and FWD 135, 150 and 170 versions must be taken with Manual air conditioning. Not available on Quickshift engines. (2) For list of compatible Bluetooth devices visit https://www.renault.co.uk/services/multimedia/bluetooth-compatibility.html (3) Not available with Glazing Pack or with LML and LHL versions if not twin wheel variant (4) Must be ordered with a locking differential and is not available with Power take off, MediaNay, Lane departure warning, Automatic high-low beam or 4.5T versions. Due to the weight of the 4x4 system selecting this option will reduce your payload. (5) Front lateral airbag covers thorax only (6) Not available on SUB versions (7) Standard on 4.5T and needs to be calibrated by the dealership on hand-over (8) Not available on 4.5T versions (9) Must be taken with battery interface (10) Not available with increase idle speed. Not available on Quickshift (11) Not available on 4.5T versions (9) Must be taken with battery interface (10) Not available on the weight of the 4x4 system selecting this option will reduce your payload. (11) Not available on 4.5T versions (9) Must be taken with battery interface (10) Not available on 4.5T versions (11) Not available on 4.5T versions (12) Cannot be taken with Alropg - front passenger (13) Not available with front lateral curtain airbag (14) Not available with Power take off - gearbox (15) Not available on twin RWD versions (16) Not compatibile with Allow wheels (17) Only available on Twin RWD versions (21) Not available on LWB Crew Van Versions: (22) Not available on 2.0T ZE. versions (23) Must be ordered with Blind spot warning on Quickshift engines (24) Must be ordered with MediaNav on Quickshift engines

Doors, windows and bulkheads

| | PANEL | CREW |
|--|-------|------|
| DOORS, WINDOWS & BULKHEADS | | |
| Right side loading door - unglazed | 0 | - |
| Glazing for side loading doors / right hand panel - non-opening windows ⁽⁴⁾ | 0 | • |
| Opening windows in glazed side loading doors (1) | 0 | 0 |
| Rear doors - glazed, 180° | 0 | 0 |
| Rear doors - glazed 270° (2)(3) | 0 | - |
| Rear doors - unglazed, 270° ⁽²⁾ | 0 | 0 |
| Heated rear window | 0 | 0 |
| Glazing pack - Left side loading door - glazed with non opening window, Right side panel - glazed with non opening window, Rear doors - glazed, 180°, Left and right quarter panels - glazed | 0 | - |

•= Standard (therefore no cost) o= Optional -= Not available

No window or door options available on MASTER Z.E.

(1) Must be taken with glazed sides (2) Not available on SWB versions 3) Not compatible with door ladder (4) Not compatible with Driver's seat - fully adjustable suspension type

MASTER Conversions

MASTER CONVERSIONS

| MASTER CONVERSIONS | WLTP CO ₂ (g/km) ⁺ | Combined fuel | Max. payload (kg) |
|---|--|--------------------------------|-------------------|
| VERSIONS | WEIP CO ₂ (g/kiii) ² | consumption (mpg) ⁺ | Max. paytoau (kg) |
| CHASSIS CAB SINGLE CAB | | | |
| L2H1 | | | |
| Chassis Cab FWD ML35 dCi 135 Business MY19 | 327 | 22.8 | 1714 |
| Chassis Cab RWD ML35 dCi 130 Business MY19 | TBC | ТВС | 1601 |
| L2H1 LONG OVERHANG | | | |
| Chassis Cab RWD MLL45TW ENERGY dCi 145 Business MY19 | TBC | ТВС | 2410 |
| L3H1 | | | |
| Chassis Cab FWD LL35 dCi 135 Business MY19 | 327 | 22.8 | 1693 |
| Chassis Cab FWD LL35 ENERGY dCi 150 Business MY19 | 323 | 23.0 | TBC |
| Chassis Cab RWD LL35 dCi 130 Business MY19 | TBC | TBC | 1550 |
| L3H1 LONG OVERHANG | | | |
| Chassis Cab RWD LLL35TW ENERGY dCi 145 Business MY19 | TBC | TBC | 1405 |
| CHASSIS CAB DOUBLE CAB | | | |
| L3H1 | | | |
| Chassis Double Cab FWD LL35 ENERGY dCi 150 Business MY19 | 323 | 23.0 | 1521 |
| L3H1 LONG OVERHANG | | | |
| Chassis Double Cab RWD LLL35TW ENERGY dCi 145 Business MY19 | TBC | ТВС | 1206 |
| PLATFORM CAB | | | |
| L3H1 | | | |
| Platform Cab FWD LL35 dCi 135 Business MY19 | 327 | 22.8 | 1775 |
| Platform Cab FWD LL35 dCi 145 Business MY20 | 327 | 22.8 | 1775 |
| Platform Cab FWD LL35 ENERGY dCi 150 Business MY19 | 323 | 23.0 | 1775 |
| Platform Cab FWD LL35 dCi 150 Quickshift6 Business MY19 | 326 | 22.8 | 1775 |
| DROPSIDE SINGLE CAB | | | |
| L2H1 (REAR CORNER PILLARS) | | | |
| Chassis Cab Dropside (incl. Rear Corner Pillars) FWD ML35 dCi 135 Business MY20 | 327 | 22.8 | 1471 |
| L3H1 (REAR CORNER PILLARS) | | | |
| chassis Cab Dropside (incl. Rear Corner Pillars) FWD LL35 dCi 135 Business MY20 | 327 | 22.8 | 1447 |
| Chassis Cab Dropside (incl. Rear Corner Pillars) FWD LL35 ENERGY dCi 150 Business MY20 | 323 | 23.0 | 1447 |
| Chassis Cab Dropside (incl. Rear Corner Pillars) RWD LL35 dCi 130 Business MY20 | TBC | TBC | 1590 |
| L3H1 LONG OVERHANG (REAR CORNER PILLARS) | 100 | | 1570 |
| Chassis Cab Dropside (incl. Rear Corner Pillars) RWD LLL35TW ENERGY dCi 145 Business MY20 | ТВС | TBC | 1635 |
| | The | TBC | |
| Chassis Cab Dropside (incl. Tail Lift) FWD ML35 dCi 135 Business MY20 | 327 | 22.8 | 1306 |
| | 132 | | 0001 |
| Chassis Cab Dropside (incl. Tail Lift) FWD LL35 dCi 135 Business MY20 | 327 | 22.8 | 1282 |
| Chassis Cab Dropside (incl. Tail Lift) FWD LL35 dCl 135 BUSINESS M120 | 323 | 22.8 | 1282 |
| | TBC | TBC | 1282 |
| Chassis Cab Dropside (incl. Tail Lift) RWD LL35 dCi 130 Business MY20 | | | 142.5 |
| | TPC | TPC | 1470 |
| Chassis Cab Dropside (incl. Tail Lift) RWD LLL35TW ENERGY dCi 145 Business MY20 | ТВС | TBC | 14/0 |
| DROPSIDE DOUBLE CAB | | | |
| L3H1 (REAR CORNER PILLARS) | | | |
| Chassis Double Cab Dropside (incl. Rear Corner Pillars) FWD LL35 ENERGY dCi 150 Business MY20 | TBC | 42.8 | 1664 |
| L3H1 (TAIL LIFT) | | | |
| Chassis Double Cab Dropside (incl. Tail Lift) FWD LL35 ENERGY dCi 150 Business MY20 | TBC | 42.8 | 1499 |

MASTER CONVERSIONS

| VERSIONS | WLTP CO₂ (g/km) ⁺ | Combined fuel consumption (mpg) ⁺ | Max. payload (kg) |
|--|------------------------------|---|-------------------|
| TIPPER SINGLE CAB | | | |
| L2H1 | | | |
| Tipper Single Cab FWD ML35 dCi 135 Business MY19 | 327 | 22.8 | 1217 |
| Tipper Single Cab RWD ML35 dCi 130 Business MY19 | TBC | ТВС | 1104 |
| Tipper Single Cab RWD ML35TW dCi 130 Business MY19 | ТВС | TBC | 934 |
| TIPPER DOUBLE CAB | | | |
| L3H1 | | | |
| Tipper Double Cab RWD LL35 ENERGY dCi 145 Business MY19 | ТВС | ТВС | 890 |
| L2H1 LONG OVERHANG | | | |
| Tipper Double Cab RWD MLL35TW dCi 130 Business MY19 | TBC | TBC | 825 |
| ALUMINIUM TIPPER SINGLE CAB | | | |
| L2H1 | | | |
| Aluminium Tipper Single Cab FWD ML35 dCi 135 Business MY19 | 327 | 22.8 | 1314 |
| Aluminium Tipper Single Cab RWD ML35 dCi 130 Business MY19 | TBC | TBC | 1201 |
| Aluminium Tipper Single Cab RWD ML35TW dCi 130 Business MY19 | TBC | TBC | 1020 |
| ALUMINIUM TIPPER DOUBLE CAB | | | |
| L3H1 | | | |
| Aluminium Tipper Double Cab RWD LL35 dCi 130 Business MY19 | TBC | TBC | 953 |
| Aluminium Tipper Double Cab RWD LL35TW ENERGY dCi 145 Business MY19 | TBC | TBC | 808 |
| LUTON LOW LOADER | | | |
| L3H1 | | | |
| Luton Low Loader FWD LL35 dCi 135 Business MY19 | 327 | 22.8 | 1238 |
| Luton Low Loader FWD LL35 ENERGY dCi 150 Business MY19 | 323 | 23.0 | 1238 |
| Luton Low Loader FWD LL35 dCi 150 Quickshift6 Business MY19 | 326 | 22.8 | 1238 |
| LUTON BOX VAN | | | |
| L3H1 | | | |
| Luton Box Van 20M ³ RWD LL35 dCi 130 Business MY19 | TBC | TBC | 1061 |
| Luton Box Van 20M ³ FWD LL35 ENERGY dCi 145 Business MY19 | TBC | TBC | 1204 |
| Luton Box Van 20M3 (incl. Tail Lift) FWD LL35 ENERGY dCi 145 Business MY20 | TBC | TBC | 1204 |
| Luton Box Van 20M3 (incl. Tail Lift) RWD LL35 dCi 130 Business MY20 | TBC | TBC | 1061 |

MASTER Z.E. PLATFORM CAB - BUSINESS - BATTERY FULL PURCHASE

| VERSIONS | WLTP CO₂ (g/km)* | Power Unit Output kW (bhp) | Max. payload (kg) |
|--|---------------------|-------------------------------|-------------------|
| L3H1 PLATFORM CAB | | | |
| Platform Cab FWD LL31 i Z.E. Business MY19 | 0 | 57 (76) | 1305 |
| Platform Cab FWD LL35 i Z.E. Business MY20 | 0 | 57 (76) | 1720 |
| L3H1 LUTON LOW LOADER | | | |
| Luton Low Loader FWD LL31 i Z.E. Business MY20 | 0 | 57 (76) | 768 |
| Luton Low Loader FWD LL35 i Z.E. Business MY20 | 0 | 57 (76) | 1183 |
| L2H1 CHASSIS CAB | | | |
| Chassis Cab FWD ML35 i Z.E. Business MY20 | 0 | 57 (76) | 1620 |
| L3H1 CHASSIS CAB | | | |
| Chassis Cab FWD LL35 i Z.E. Business MY20 | 0 | 57 (76) | 1600 |

† WLTP figures shown are for comparability purposes; only compare figures with vehicles tested to the same technical procedures. Actual real world driving results may vary depending on factors such as weather conditions, driving styles, vehicle load or any accessories fitted after registration. WLTP is a new test used for fuel consumption and CO₂ figures. Please visit renault.co.uk/configure for WLTP figures for any selected options. (1) Heavy Duty engine homologated and tested to NEDC protocol.

MASTER Conversions options

| | S | SINGLE CA | CHASSIS B | | LE CAB | | FORM .E CAB | SINGL | DROI E CAB | PSIDE DOUB | LE CAB | SINGL | TIPPER E CAB | DOUBLE CAB | LUTON LOA | | LUTON E | BOX VAN |
|--|-----|-----------|--------------|-----|--------|-------------------|----------------|-------|---------------|---------------|--------|-------|-----------------|---------------|-------------------|------|-------------------|-------------------|
| | FWD | RWD | Z.E. | FWD | RWD | FWD | Z.E. | FWD | RWD | FWD | RWD | FWD | RWD | RWD | FWD | Z.E. | FWD | RWD |
| BASICS | | | | | | | | 1 | | | | | | | | | 1 | |
| Air suspension (16) (20) | 0 | - | - | 0 | - | 0 | - | 0 | - | 0 | - | 0 | - | - | 0 | - | 0 | - |
| B-pillar wiring connection point ⁽⁶⁾ | 0 | 0 | 0 | - | - | 0 | 0 | 0 | 0 | - | - | 0 | 0 | - | • | 0 | - | - |
| Battery interface | 0 | 0 | - | 0 | 0 | 0 | - | • | • | • | • | • | • | • | 0 | - | 0 | 0 |
| CAN interface unit | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 |
| Digital tachograph and CAN interface unit (5) | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 |
| Engine speed limiter - 56mph/90kmh (to meet legal requirement) (5) | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 |
| Engine speed limiter (56mph/90kmh or 62mph/100kmh or 68mph/110kmh) ⁽⁶⁾ | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 |
| Fuel tank - 105 litres (7) | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | O ⁽¹¹⁾ | O ⁽¹¹⁾ |
| Increased idle speed ^(B) | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 |
| Key - 2 button hands free key | 0 | 0 | 0 | 0 | 0 | 0 | o | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Key - additional (third) key | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Locking differential (17) | - | 0 | - | - | 0 | - | - | - | 0 | - | 0 | - | 0 | 0 | - | - | - | 0 |
| Long wiring loom | 0 | 0 | - | 0 | 0 | 0 | - | - | - | - | - | 0 | 0 | 0 | 0 | - | - | - |
| Power take off - engine | - | - | - | - | - | - | - | - | - | 0 | - | 0 | - | - | - | - | - | - |
| Power take off - engine, and manual air conditioning with pollen filter (8) (9) | - | 0 | - | - | 0 | - | - | 0 | 0 | - | 0 | 0 | 0 | 0 | - | - | - | 0 |
| Power take off - engine, battery interface and air conditioning with pollen filter $^{\scriptscriptstyle (B)(9)}$ | o | - | - | 0 | - | 0 | - | - | - | - | - | - | - | - | 0 | - | 0 | - |
| Power take off - engine and converter pack 1 $^{(3)(8)(9)(18)(19)}$ | 0 | 0 | - | - | - | 0 | - | - | - | - | - | - | - | - | - | | - | - |
| Power take off - engine and converter pack 2 (3) (8) (9) (18) | 0 | 0 | - | 0 | 0 | 0 | - | - | - | - | - | - | - | - | 0 | - | - | - |
| Power take off - gearbox (8) (9) (11) (17) | - | 0 | - | - | 0 | - | - | - | 0 | - | 0 | - | 0 | 0 | - | - | - | 0 |
| Reinforced battery ^{(9) (12) (23)} | 0 | 0 | • | 0 | 0 | 0 | • | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | • | 0 | 0 |
| Smoker pack | 0 | 0 | 0 | 0 | 0 | 0 | o | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towing twin wheel heavy duty option: increase to 3,500 Kg $^{\scriptscriptstyle (6)(9)(10)}$ | - | 0 | - | - | 0 | - | - | - | 0 | - | 0 | - | 0 | 0 | - | - | - | 0 |
| Converter pack 1: Battery interface, B pillar wiring connection point, long wiring loom | 0 | 0 | - | - | - | O ⁽²³⁾ | - | - | - | - | - | - | - | - | O ⁽²³⁾ | - | 0 | - |
| Converter pack 2: CAN interface unit, battery interface, long wiring loom | 0 | 0 | - | 0 | 0 | 0 | - | - | - | - | - | - | - | - | 0 | | 0 | - |
| Converter pack 3: CAN interface unit, battery interface, B pillar wiring connection point, long wiring loom | 0 | 0 | - | - | - | O ⁽²³⁾ | - | - | - | - | - | - | - | - | O ⁽²³⁾ | - | 0 | - |
| CONNECTIVITY | | | | | | | | | | | | | | | | | | |
| MediaNav multimedia system: 7" touchscreen, Navteq navigation, FM/AM/ DAB tuner, 2x20W speakers, Bluetooth" hands-free calls, USB and AUX sockets ⁽²⁾ | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | o | 0 | 0 | - | 0 | 0 |
| COMFORT | | | | | | | | | | | | | | | | | | |
| Cruise control with speed limiter | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Driver's seat - fully adjustable suspension type (13) (26) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Electric front windows - driver's side one-touch descending | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Manual air conditioning with pollen filter | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 |
| Passenger's seat - height-adjustable with lumbar adjustment single seat | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Passenger's seat - height-adjustable single seat (14) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pivoting seatback table (15) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pivoting seatback table with dual split underseat storage compartment $^{\scriptscriptstyle (15)}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 |
| Driving Pack: Manual air conditioning with pollen filter, Electric front windows - driver's side one-touch descending, cruise control with speed limiter | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 |

| | S | CHASSIS SINGLE CAB | | | | | | | | | | | | | PLATI SINGL | | SING | DROI E CAB | PSIDE DOUBLE CAB | | SINGL | TIPPER E CAB | DOUBLE CAB | LUTON | | LUTON E | 30X VAN |
|---|-----|-----------------------|------|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|----------------|------|------|---------------|---------------------|--|-------|-----------------|---------------|-------|--|---------|---------|
| | FWD | RWD | Z.E. | FWD | RWD | FWD | Z.E. | FWD | RWD | FWD | RWD | FWD | RWD | RWD | FWD | Z.E. | FWD | RWD | | | | | | | | | |
| PROTECT | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Advanced emergency braking system (25) | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 | | | | | | | | | |
| Airbag - front passenger | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |
| Airbag - front passenger and front lateral curtain (driver and passenger), and single passenger seat (height adjustable) with lumbar adjustment | 0 | 0 | o | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | o | 0 | 0 | | | | | | | | | |
| Automatic high/low beam and front fog lights (4.5T versions only) | - | 0 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | | | | | | | | |
| Front fog lights | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |
| Wide view mirror | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |
| 4x4 ⁽⁴⁾ | - | 0 | - | - | - | - | - | - | 0 | - | - | - | 0 | - | - | - | - | - | | | | | | | | | |
| STYLE | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16" alloy wheels (16) (24) | 0 | - | - | 0 | - | 0 | - | 0 | - | 0 | - | 0 | - | - | 0 | - | 0 | - | | | | | | | | | |
| 16" steel wheels with large wheel stylers (12) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |
| All-weather tyres (16) | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | 0 | | | | | | | | | |
| Dropside - tool compartment and ladder rack (21)(22) | - | - | - | - | - | - | - | 0 | 0 | 0 | 0 | - | - | - | - | - | - | - | | | | | | | | | |
| Extended door mirror arms | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | • | • | | | | | | | | | |
| Metallic paint (1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |
| Mudflaps (front and rear) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |
| Tow bar (7) | 0 | 0 | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - | 0 | - | | | | | | | | | |
| ELECTRIC | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| EVSE Cable for 10 amp charging using domestic 3-pin plug | - | - | 0 | - | - | - | 0 | - | - | - | - | - | - | - | - | 0 | - | - | | | | | | | | | |
| Type 2 Mennekes charging cable 32A (IEC - 629196) 6m | - | - | 0 | - | - | - | 0 | - | - | - | - | - | - | - | - | 0 | - | - | | | | | | | | | |

•= Standard (therefore no cost) o= Optional -= Not available #Manufacturer's recommended retail prices.

(1) On the Box Van and Low Loader versions, only the base chassis is painted. The box will remain white. If your box is required to be painted, please contact your local dealer to get a quote. (2) For list of compatible Bluetooth devices visit https://www.renault.co.uk/services/multimedia/bluetooth-compatibility. html (3) On FWD 135, 150 and 180 versions must be ordered with a locking differential and is not available on Quickshift engines. (4) Only available on 3.5T Chassis Cab single cab, Dropside single cab, Dropside double cab & Panel Vans. Must be ordered with a locking differential and is not available with Power take off, MediaNav, Lane departure warning, Automatic high-low beam or 4.5T versions. Due to the weight of the 4x4 system selecting this option will reduce your payload. (5) Standard on 4.5T versions and the digital tachograph needs to be calibrated by the dealership on hand-over (6) Not available on 4.5T versions (7) Not available on FWD 135, lot available on fere of together (9) Not available on Quickshift versions (10) Only available on Twin RWD Versions (11) Not compatible with ECO Mode and Increased idle speed (12) Not available on twin RWD versions (13) Cannot be ordered with Front lateral curtain airbag (14) Standard on Double Cab Factory Tipper and LWB Twin rear wheel Dropsides. Still optional on Aluminium Tippers (15) Cannot be ordered with Front lateral curtain airbag (14) Not available on FWD (17) Not available on FWD (18) Requires to be taken with Long wiring loom and Battery interface (19) Requires to be taken with All-weather tyres (25) Cannot be ordered with Front parking sensors (26) Not available on 3.1T Z.E. versions

Renault PRO+, the specialist brand



You're the expert in your field and at Renault PRO+ we're here to guide you through ours. We're passionate about delivering products and services to move your business forward. So when you choose to partner with Renault PRO+ you can expect:

Specialist network

Renault PRO+ Centres have a dedicated commercial vehicle specialist. So whatever you're seeking advice on, there's always someone to help.

Business Commitment

Come rain or shine, we have a set of commitments in place to help maximise uptime and minimise downtime.

The future today - 100% electric

Renault PRO+ has been building, selling and maintaining electric vans since 2011. So when you're looking to make the switch, you know who to speak to.

A tailored approach

Your vehicles are as unique as your business. That's why we have a programme of conversions to deliver exactly the product you want. From 'off the shelf' conversions to a more bespoke approach. We'll guide you through.

Renault services

3 Years Warranty

Your vehicle is covered by a warranty package for up to 3 years from date of first registration (unlimited mileage during the first 24 months, followed by a further 1 year limited to a total mileage of 100,000). Your Renault Dealer is able to repair or replace without charge, parts that are found to have a material or assembly defect that is recognised by Renault. The paintwork warranty runs for 3 years and the anti-corrosion warranty for 6 years.

For Warranty Terms and Conditions please visit www.renault.co.uk/warranty.

3 Years Renault Assistance

Should you need it, we'll provide emergency roadside repairs or tow you to the nearest Renault Dealer. This service is available 24 hours a day and is provided for 36 months from the date of first registration (unlimited mileage for first 24 months, then limited to a total of 100,000 miles or 3 years, whichever comes first). Assistance is provided within the UK & Northern Ireland only at roadside, home and includes national recovery and onward travel. Assistance applies to mechanical or electrical defects which are covered by warranty.

For Renault Assistance Terms and Conditions please visit www.renault.co.uk/assistance.

Service Intervals

MASTER Z.E. Service: Year 1 / 12,000 miles, Year 2 / 24,000 miles and then every 2 years / 24,000 miles thereafter

MASTER all other engines and versions: 24,000 miles / 2 years

Renault Network Services

No-one is better placed than Renault to maintain, fit and repair your Renault, fast. The Renault Minute (maintenance and repair with no appointment necessary) and Renault Rapide Bodycare (bumper scuffs, dings and dents, windscreen, stone chips and interior repairs...) services deliver the highest level of repair and maintenance and offer a full year's guarantee on original Renault parts. Don't forget to have a look at our wide range of additional equipment and accessories!

Renault iCare

Is an innovative Service, Maintenance & Repair product that supplies Business customers with a fully supported, managed hassle free service and maintenance package.

Renault iCare is a "Pay-As-You-Go" product that insures your vehicle is maintained by Renault technical experts when work is required.

iCare provides the following benefits:

- Full Service, Maintenance & Repair cover in the Renault Dealer Network
 - Tyres can be included within the contract at an additional fixed cost
 - Ancillary equipment can also be included (at an additional fixed monthly cost)
- Excludes: Damage/Neglect/Abuse/Glass & Bulbs
- A fixed, pre agreed pence per mile rate
- No excess mileage charges at the end of the contract
- No pooled mileage administration
- Minimalise downtime

For more information and to obtain a quote based on your requirements, please speak to your local Renault Business dealer or visit www.renault.co.uk/icare

Customer Relations

Renault knows the value of communicating with its customers and we have established effective ways to keep in touch with you. If, after speaking to your local Renault dealership, you are not completely satisfied, please contact the Renault UK Customer Relations Department on 0344 3350000⁺ (Mon-Fri 9.00am to 5.30pm, except Weds 10.00am to 5.30pm. Closed on Bank Holidays). You can also visit our website www.renault.co.uk or write to us at: Renault UK Ltd, The Rivers Office Park, Denham Way, Maple Cross, Rickmansworth, Hertfordshire, WD3 9YS.

Finance options*

There are numerous ways that you can finance your new vehicle with Renault. Whether you are a fleet or a private buyer, Renault Finance allows you to tailor your payment plan to your needs and circumstances.



*Finance provided by Renault Finance, P.O. Box 149, Watford, WD17 1FJ. Guarantees and indemnities may be required. You must be at least 18 and a UK resident (excludes Isle of Man and Channel Islands) to apply. Subject to status, terms and conditions apply. †Calls to 0330 numbers are free if used as part of your inclusive mobile minutes and are charged at local rates from landlines. Renault UK Limited (company number 82932), registered at The Rivers Office Park, Denham Way, Maple Cross, Rickmansworth, Hertfordshire, WD3 9YS.

Continue the Renault **MASTER** experience at **www.renault.co.uk**

Although every effort has been made to ensure that the information contained within this brochure is as accurate and up to date as possible, Renault U.K. reserves the right to modify its models without notice, including their characteristics, specifications, equipment and accessories. Brochures inevitably become out of date or inaccurate in some respects, in that such characteristics, specifications equipment, or accessories may be changed after the publication date given below and can differ from the descriptions given or the photos displayed. It is therefore necessary to check with your Renault Dealer before purchasing any product that the characteristics, specifications, equipment or accessories of the vehicle on order are as advertised.

Renault recommends

🤹 Prodigious 🛛 Photo credits: J.B. Lemal, P. Curtet, T. Motta, W. Crozes - Mathématic - 🖾 Renault Marketing 3D - Commerce – 7701 380 809 – October 2020.